

Datasheet | EB07

EP-361-F1 Series



General Purpose AC EMI Filter

Approvals /Conformance



Technical Specifications

Operating voltage	120/250 VAC
Current rating	1A - 10A
Frequency	50/60Hz
Voltage drop	1 Volt max.
High potential test voltage	P -> E 1500VAC P -> N 1414VDC (applicable excluding surge suppressor filter)
Insulation resistance	$\geq 300 \text{ M}\Omega @ 500\text{VDC (PN} \rightarrow \text{E)}$
Operating temperature	40°C / -25°C +85°C



*Image shown is for illustrative purpose only

Features and benefits

- | All filters provide high attenuation performance.
- | All filters compliance to EN60939-3:2015 & EN60939-2:2005 standards
- | Filter available in panel mounting provision.
- | High reliable
- | CRCA metal can with nickel plating provides good aesthetic and corrosion protection.
- | Provides single fuse protection.
- | Input connection through IEC 60320 C14 plug
- | Have choice to select output connection type.
- | Filters available in medical version without capacitor to earth.
- | With surge suppressor filters also available.

Application

- | Consumer product
- | Medical equipment
- | Industrial application
- | Weighing machines
- | Electrical automation equipment
- | Testing and measurement equipment


Attenuation type

Single Stage


Standard

Electrical schematic for filter:

General purpose –

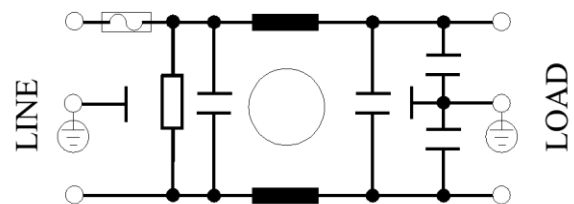


General purpose with surge suppressor –

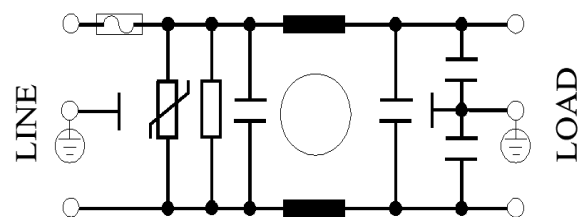


Electrical schematic for filter :

Medical equipment application –

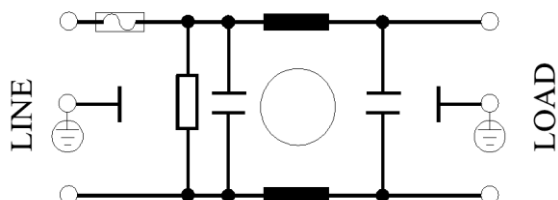


Medical equipment application with surge suppressor -

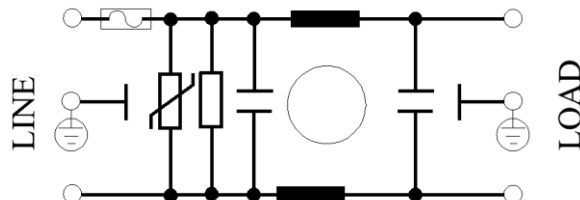

Mechanical Drawing

Fast-on terminal

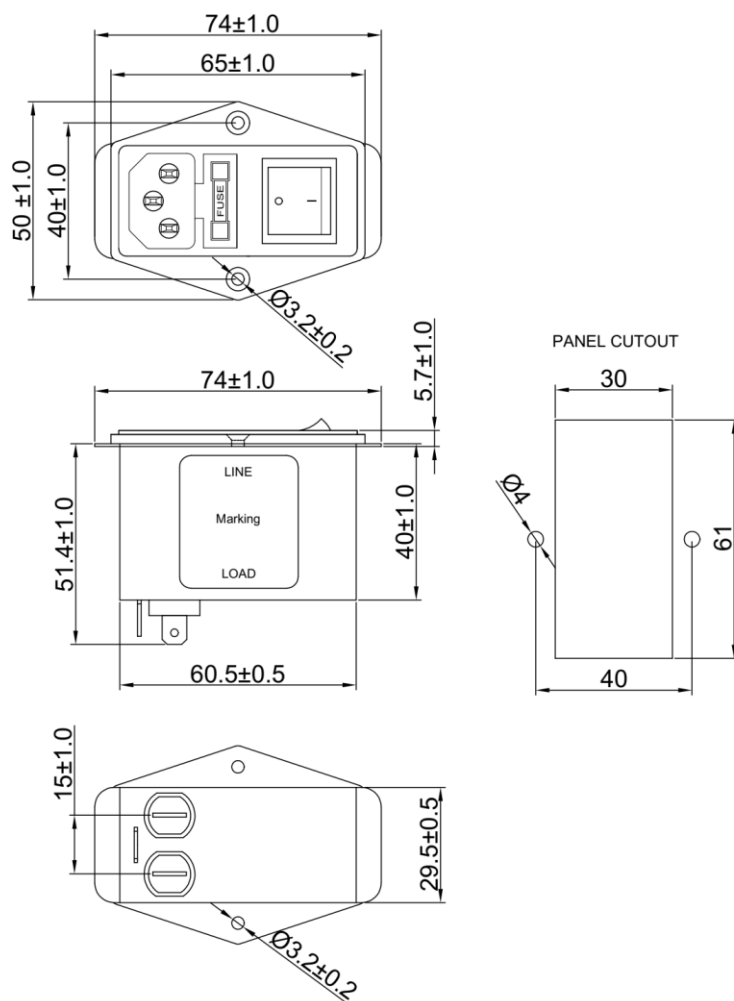

All dimensions in mm.
General tolerance $\pm 1\%$

Datasheet | EB07

EP-361-F1 Series



Product Selection Table:

Sr. No.	Elcom part codes (ordering code)	Rated Current rating (A) @40°C	Leakage current (mA) @250VAC	Output terminals (X)		Max. Peak current (8/20 μ sec 1 time) (KA)	Energy surge rating (10/100 0 μ sec) (Joules)	Approx. Weight (gm)	Attenuation
				Fast-on 	Wire 				
1	EF-1B001X01E- B07	1	< 0.5	B	G	----	----	80	Standard
2	EF-1B001X02E- B07	1	< 0.5	B	G	6.5	175	80	Standard
3	EF-1B001X03E- B07	1	< 0.003	B	G	----	----	80	Standard
4	EF-1B001X04E- B07	1	< 0.003	B	G	6.5	175	80	Standard
5	EF-1B003X01E- B07	3	< 0.5	B	G	----	----	80	Standard
6	EF-1B003X02E- B07	3	< 0.5	B	G	6.5	175	80	Standard
7	EF-1B003X03E- B07	3	< 0.003	B	G	----	----	80	Standard
8	EF-1B003X04E- B07	3	< 0.003	B	G	6.5	175	80	Standard
9	EF-1B006X01E- B07	6	< 0.5	B	G	----	----	80	Standard
10	EF-1B006X02E- B07	6	< 0.5	B	G	6.5	175	80	Standard
11	EF-1B006X03E- B07	6	< 0.003	B	G	----	----	80	Standard
12	EF-1B006X04E- B07	6	< 0.003	B	G	6.5	175	80	Standard
13	EF-1B010X01E- B07	10	< 0.5	B	G	----	----	80	Standard
14	EF-1B010X02E- B07	10	< 0.5	B	G	6.5	175	80	Standard
15	EF-1B010X03E- B07	10	< 0.003	B	G	----	----	80	Standard
16	EF-1B010X04E- B07	10	< 0.003	B	G	6.5	175	80	Standard

- To compile complete part number, replace the 'X' with required output connection terminal. (e.g. EF-1B001B01E-B07)
- Maximum leakage under usual AC operating conditions (acc. IEC 60939-3). Note: if the neutral line is interrupted, worst case leakage could reach twice this level.
- Customize products provided on request.
-

Datasheet | EB07

EP-361-F1 Series



Connection Method

Current Rating (A)	Fast -on	Wire	Earthing
1, 3 & 6	6.3 X 0.8mm	18AWG	Fast-on/wire leads
10		14AWG	

Filter attenuation graph

C = Common mode (asymmetrical) —————
D = Differential mode (symmetrical) - - - - -

For general purpose

