


## General Purpose AC EMI Filter

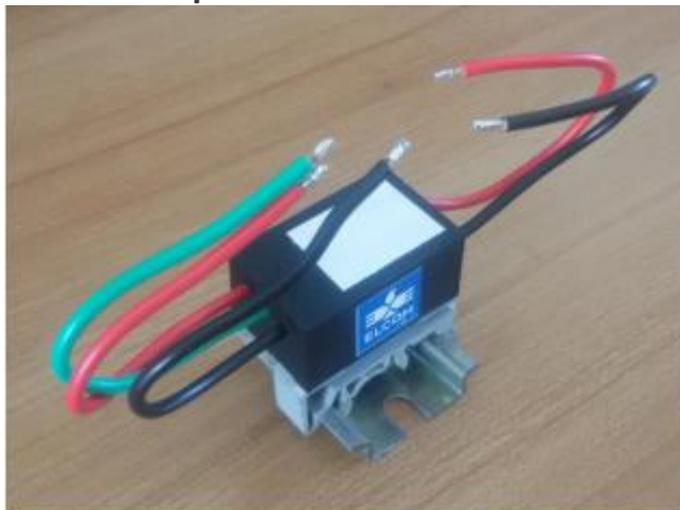

\*Image shown is for illustrative purpose only

## Features and benefits

- | All filters provide high attenuation performance.
- | All filters compliance to EN60939-3:2015 & EN60939- 2:2005 standards.
- | Compact drill rail mounting design.
- | High reliable.
- | Plastic housing with good aesthetic.
- | Single stage.
- | Input and output connection through wire
- | Filters available in medical version without capacitor to earth.
- | With surge suppressor filters also available.
- | Cost effective solution.

## Application

- | Electrical and electronic equipment
- | Consumer product
- | Medical equipment
- | SMPS
- | Test & measurement equipment
- | Small to medium-sized machines and household equipment
- | Office automation equipment

## Conformance



## Technical Specifications


Operating voltage	120/250 VAC
Current rating	1A - 10A
Frequency	50/60Hz
Voltage drop	1 Volt max.
High potential test voltage	P -> E 1500VAC P -> N 1414VDC (applicable excluding surge suppressor filter)
Insulation resistance	≥ 300 MΩ @ 500VDC (PN→E)
Operating temperature	40°c /-25°c +85°c

## Attenuation type


Single Stage **Standard**

## Electrical schematic for Single Stage Filter

### General purpose –

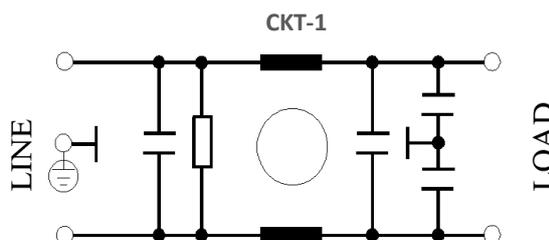

## Mechanical details

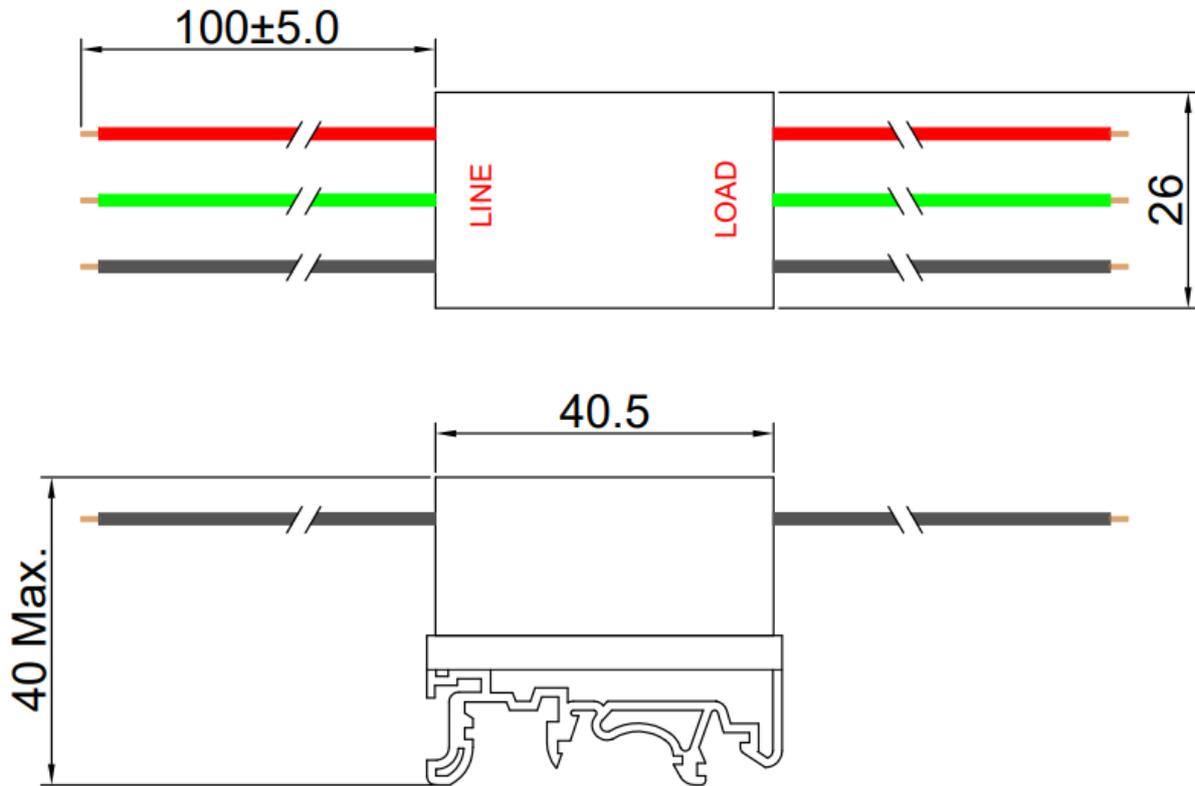

All dimensions in mm  
General tolerance=±2%

## Filter Selection Table

Sr. No.	Elcom part codes (ordering code)	Rated Current rating (A) @40°C	Leakage current (mA) @250VAC	Terminal	Approx. Weight (gm)	Attenuation
				Wire 		
1	EF-1B001G01G-E03	1	< 0.5	G	75	Standard
2	EF-1B003G01G-E03	3	< 0.5	G	75	Standard
3	EF-1B006G01G-E03	6	< 0.5	G	75	Standard
4	EF-1B010G01G-E03	10	< 0.5	G	75	Standard

- To compile complete part number, replace the 'X' with required I/O connection terminal. (e.g. EF-1B001G01G-E03).
- Maximum leakage under usual AC operating conditions (acc. IEC 60939-3). Note: if the neutral line is interrupted, worst case leakage could reach twice this level
- Customize products provided on request.

## Connection Type

Current Rating (A)	Wire terminal	Earthing
1 & 3	0.5 sqmm	Wire lead
6	0.75 sqmm	
10	1 sqmm	

## Filter attenuation graph

C = Common mode (asymmetrical) —————

D = Differential mode (symmetrical) - - - - -

For General purpose Single Stage

