



32 A 3P IP44 Plug , Socket with WH in Metal Enclosure with MCB Provision


ENCLOSURE DIMENSIONS

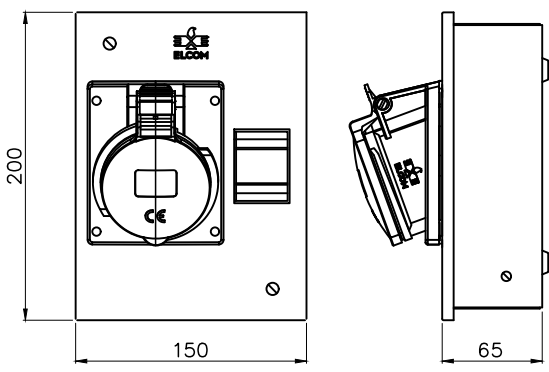


PRODUCT IMAGE

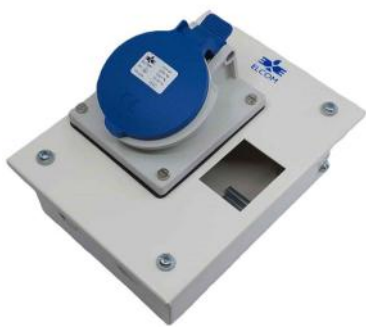

PLUG

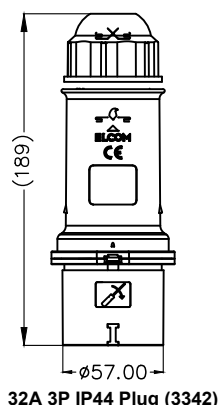

WIRING DIAGRAM

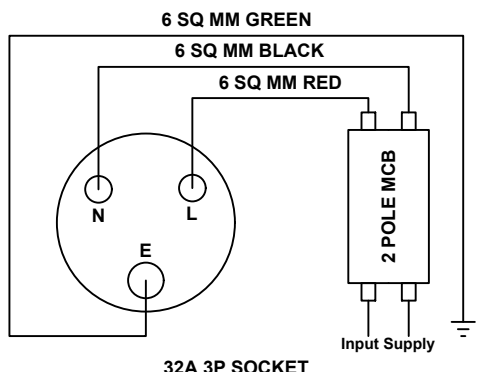

PRODUCT OVERVIEW

Plug Socket Features:

1. High impact & heat resistant polyamide material


2. Terminal with Double Screws, zinc plated

3. Glow wire Index: 850° C

4. Flame retardant material

5. Permissible temp. with / without load : -25°C to +90°C

Sr.	Description	Specification	Qty.
1	Plug	32A, 3P, IP44 Plug (3342)	1 Nos
2	Panel Mount (Angular) Socket	32A, 3P, IP44 Panel Mount (Angular) Socket (3346)	1 Nos
3	Wire Harness	6 Sq. mm. R, G, Bk Wire Harness	1 Nos
4	Metal Enclosure	150 X 200 X 65 mm, Powder Coated, RAL 9010 Glossy Finish	1 Nos

PRODUCT :- 32 A 3P IP44 Plug, Socket with WH in Metal Enclosure with MCB Provision										CODE : M33462						
APP 12.05.2024 PBM										 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com						
CHK 12.05.2024 GJG																
DRN 12.05.2024 SRK																
REV	IS	WAS	DATE	SIGN	APP	BY	DATE	SIGN								
UNSP.TOLERANCE				DIMNS. IN	WT(Gm)	SCALE:-		PROJECTION	SHEET	DRAWING NUMBER						
OVER	-	1	10	mm	Max.	NTS.			1 OF 1	M 3 3 4 6 2						REVISION
UP TO	1	10	-				R0									
±	0.5	0.8	2.0													

F:ENG-08.00

Note: Technical specifications are subject to change without prior notice

For Disposal of Product /Packing please refer note available on www.elcom-in.com

Copyright © 2024 by Elcom International Pvt.Ltd, India. All rights reserved