


32 A 5P IP44 Plug , Socket with WH in Metal Enclosure with MCB Provision


ENCLOSURE DIMENSIONS



PRODUCT IMAGE

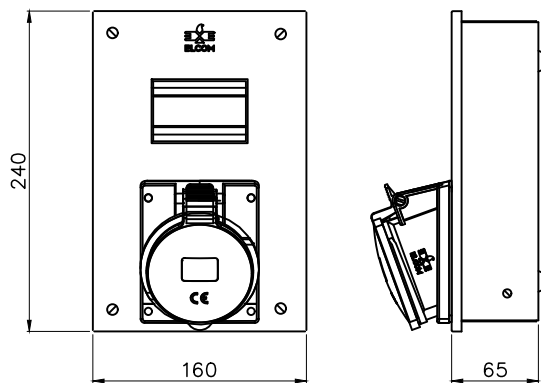


PLUG

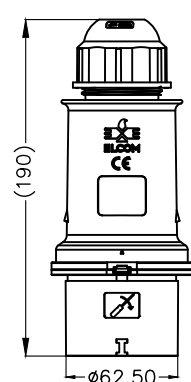

32A 5P IP44 Plug (3542)

WIRING DIAGRAM

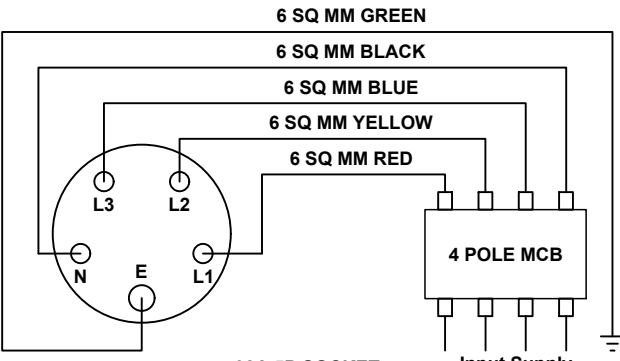

32A 5P SOCKET

4 POLE MCB

Input Supply

PRODUCT OVERVIEW

Plug Socket Features:

1. High impact & heat resistant polyamide material


2. Terminal with Double Screws, zinc plated

3. Glow wire Index: 850° C

4. Flame retardant material

5. Permissible temp. with / without load : -25°C to +90°C

Sr.	Description	Specification	Qty.
1	Plug	32A, 5P, IP44 Plug (3542)	1 Nos
2	Panel Mount (Angular) Socket	32A, 5P, IP44 Panel Mount (Angular) Socket (3546)	1 Nos
3	Wire Harness	6 Sq. mm. R, Y, B, Bk, G Wire Harness	1 Nos
4	Metal Enclosure	160 X 240 X 65 mm, Powder Coated, RAL 9010 Glossy Finish	1 Nos

						PRODUCT :- 32 A 5P IP44 Plug, Socket with WH in Metal Enclosure with MCB Provision			CODE : M35462							
						APP	12.05.2024	PBM	 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com							
						CHK	12.05.2024	GJG								
						DRN	12.05.2024	SRK								
REV	IS	WAS	DATE	SIGN	APP	BY	DATE	SIGN								
UNSP.TOLERANCE				DIMNS. IN	WT(Gm)	SCALE:-		PROJECTION	SHEET	DRAWING NUMBER						
OVER	-	1	10	mm	Max.	NTS.			1 OF 1	M 3 5 4 6 2						REVISION
UP TO	1	10	-				R0									
±	0.5	0.8	2.0													

F:ENG-08.00

Note: Technical specifications are subject to change without prior notice

For Disposal of Product /Packing please refer note available on www.elcom-in.com

Copyright © 2024 by Elcom International Pvt.Ltd, India. All rights reserved