


Combination of 16A 3P & 32A 5P IP67 Plug, Socket in Plastic Enclosure (ABS) with MCB Provision


ENCLOSURE DIMENSIONS




PRODUCT IMAGE

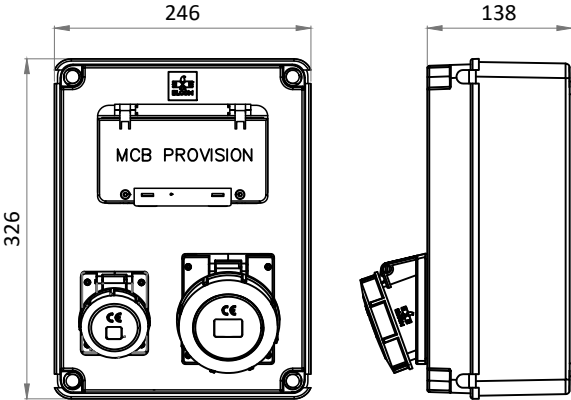

PLUG

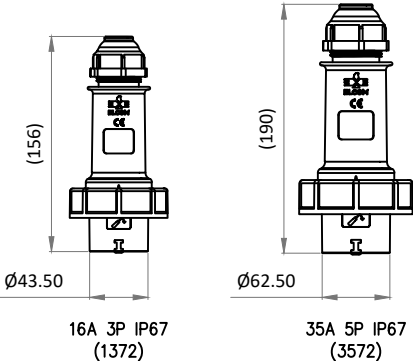


WIRING DIAGRAM

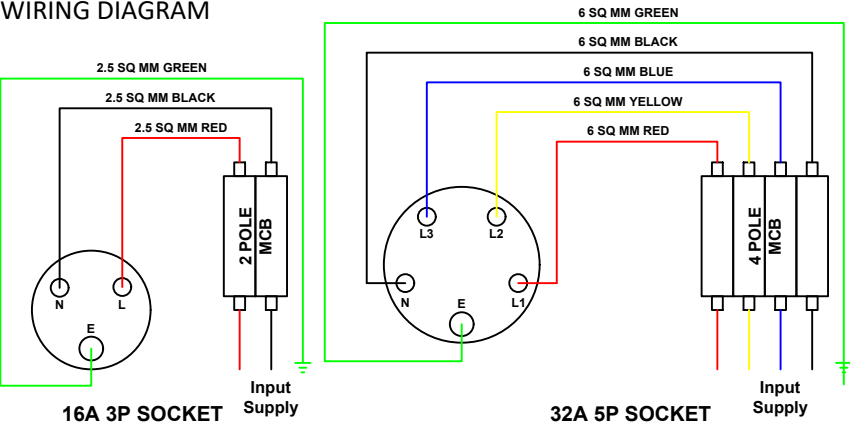

PRODUCT OVERVIEW

- Plug Socket Features:
- 1) High impact & heat resistant polyamide material
 - 2) Terminal with Double Screws, zinc plated
 - 3) Glow wire Index: 850° C
 - 4) Flame retardant material
 - 5) Permissible temp. with / without load : -25°C to +90°C

Sr. No.	Description	Specification	Qty.
1	16A Plug	16A, 3P, IP67 Plug (1372)	1 Nos
2	32A Plug	32A, 5P, IP67 Plug (3572)	1 Nos
3	16A Panel Mount (Angular) Socket	16A, 3P, IP67 Panel Mount (Angular) Socket (1376)	1 Nos
4	32A Panel Mount (Angular) Socket	32A, 5P, IP67 Panel Mount (Angular) Socket (3576)	1 Nos
5	Wire Harness for 16A	2.5 Sq. mm. R, Bk, G Wire Harness	1 Nos
6	Wire Harness for 32A	6 Sq. mm. R, Y, B, Bk, G Wire Harness	1 Nos
7	Plastic (ABS) Enclosure	246 X 326 X 138 mm, IP65, ABS	1 Nos

						PRODUCT :- Combination of 16A 3P & 32A 5P IP67 Plug, Socket in Plastic Enclosure (ABS) with MCB Provision				CODE : P2-1335762							
						APP	04.05.2024	GJG		 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com							
					CHK	04.05.2024	SRK										
R1	2.5 Sq. mm. R, Bk, G Wire Harness	2.5 Sq. mm. R, Y, Bk Wire Harness	25.07.24	SRK	GJG	DRN	04.05.2024	TRP									
REV	IS	WAS	DATE	SIGN	APP	BY	DATE	SIGN									
UNSP.TOLERANCE			DIMNS. IN	WT(Gm)	SCALE:-		PROJECTION	SHEET	DRAWING NUMBER								
OVER	-	1	10	mm	Max.			1 OF 1	P 2 - 1 3 3 5 7 6 2							REVISION	
UP TO	1	10	-														
±	0.3	0.5	1.0												R1		