



16A Panel Mount Socket - 3Pin_200V-250V_6h_IP67

BASIC DIMENSIONS

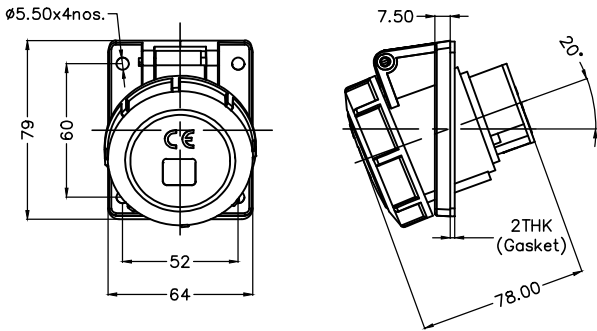

PANEL CUTOUT

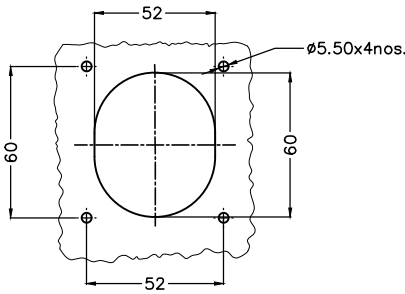





PRODUCT OVERVIEW

- IP67
- High impact & heat resistant Polyamide material
- Color coding as per Voltage
- Terminal with Double Screws, zinc plated
- Glow wire Index: 850° C
- UL-94 V-2 Flame retardant material


PINS POSITION



PRODUCT SPECIFICATION			
SR.NO.	PARAMETER		SPECIFICATION
1	Industrial Panel Mount Socket		16A, 3 Pin (2P+ E)
2	V/A Rating		16A, 200-250 VAC, 50 - 60Hz
3	Insulation Resistance At 500 V DC		100 M ohms min.
4	H.V.Break Down Test (For 1-Minute)		2 KV AC
5	Terminals		Screw-type
6	Applicable Cable Sizes		1.5 - 2.5 Sqmm
7	Earth Position		6h
8	Plug Angle		20°
9	Permissible Temp.	a. With/Without Load	-25°C TO +90°C
10	Material	a. Body	Polyamide , V2
		b. Terminals	Copper Alloy
		c. Terminal screws	MS, Zinc Plated
11	Torque	a. Tightening Torque for Screw	0.9 Nm Max.
		b. Tightening Torque for Cable Gland	NA
12	IP Protection type		IP67
13	Reference Standard		IEC/EN 60309-1, IEC/EN 60309-2, UL-1686
14	Compliance Marking		CE, RoHS Complied
15	Weight		170 gm (Approximate)

						PRODUCT :- Industrial Panel Mount Socket			CODE : 1376												
						APP	29.01.2024	GJG	 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com												
						CHK	29.01.2024	SRK													
						DRN	29.01.2024	VAK													
REV	IS	WAS	DATE	SIGN	APP	BY	DATE	SIGN													
UNSP.TOLERANCE				DIMNS. IN	WT(Gm)	SCALE:-		PROJECTION	SHEET	DRAWING NUMBER											
OVER	-	1	10	mm	Max.	NTS.			1 OF 1	0	0	0	0	0	1	3	7	6	REVISION		
UP TO	1	10	-																		
±	0.3	0.5	1.0																		
										R0											

16A Straight Socket - 3Pin_200V_250V_6h_IP67

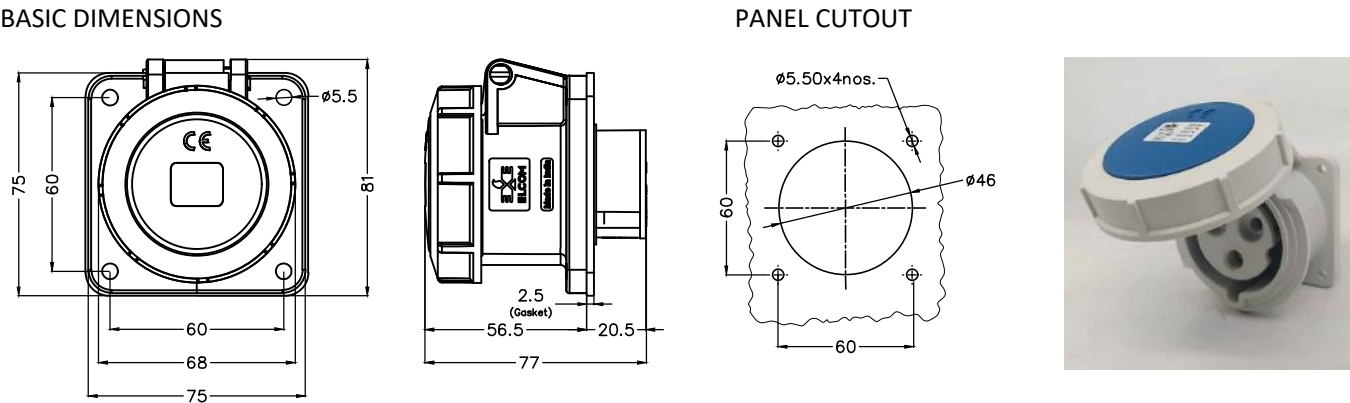


PRODUCT OVERVIEW

PINS POSITION


- IP67
- High impact & heat resistant Polyamide material
- Color coding as per Voltage
- Terminal with Double Screws, zinc plated
- Glow wire Index: 850° C
- UL-94 V-2 Flame retardant material

PRODUCT SPECIFICATION

SR.NO.	PARAMETER		SPECIFICATION
1	Panel Mount Straight Socket Type		16A, 3 Pin (2P+ E)
2	V/A Rating		16A, 200-250 VAC, 50 - 60Hz
3	Insulation Resistance At 500 V DC		100 M ohms min.
4	H.V.Break Down Test (For 1-Minute)		2 KV AC
5	Terminals		Screw-type
6	Applicable Cable Sizes		1.5 - 2.5 Sq. mm
7	Earth Position		6h
8	Plug Angle		Straight
9	Permissible Temp.	a. With/Without Load	-25°C TO +90°C
10	Material	a. Body	Polyamide , V2
		b. Terminals	Copper Alloy
		c. Terminal screws	MS, Zinc Plated
11	Torque	a. Tightening Torque for Screw	0.9 Nm Max.
12	IP Protection type		IP67
13	Reference Standard		IEC 60309-1, IEC 60309-2, UL-1686
14	Compliance Marking		CE, RoHS Complied
15	Weight		175 gm (Approximate)

							PRODUCT :- Industrial Panel Mount Straight Socket			CODE : 1377														
							APP	29.01.2024	GJG	Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com														
							CHK	29.01.2024	SRK															
							DRN	29.01.2024	SRK															
REV	IS		WAS	DATE	SIGN	APP	BY	DATE	SIGN															
UNSP.TOLERANCE				DIMNS. IN		WT(Gm)		SCALE:-		PROJECTION		SHEET		DRAWING NUMBER										
OVER	-	1	10	mm		Max.		NTS.				1 OF 1		0	0	0	0	0	1	3	7	7	REVISION	
UP TO	1	10	-											R0										
±	0.3	0.5	1.0																					

16A Panel Mount Socket - 5Pin_200V/346V-250V/415V_6h_IP67

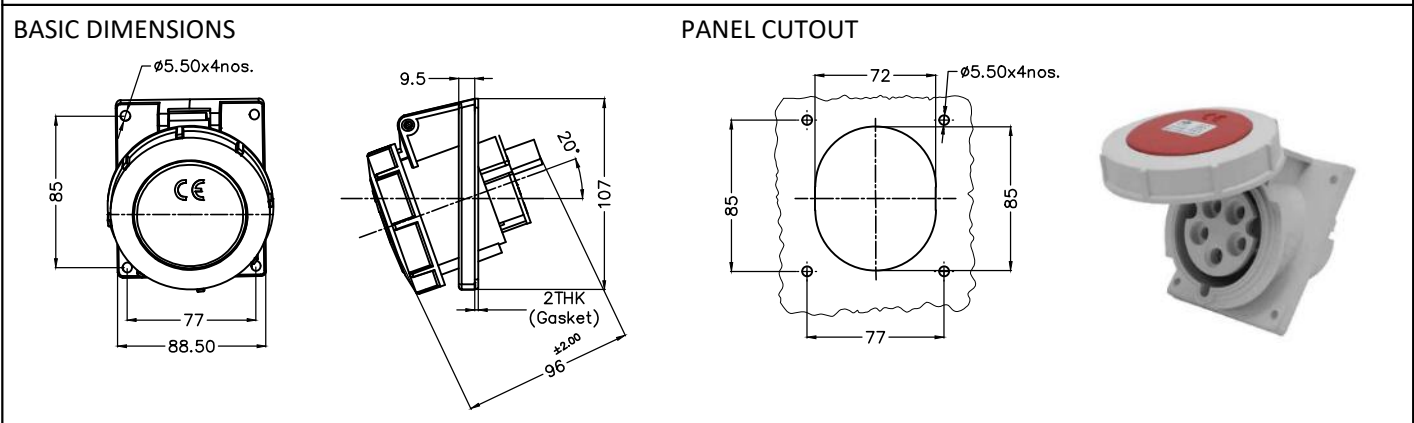


PRODUCT OVERVIEW

- IP67
- High impact & heat resistant Polyamide material
- Color coding as per Voltage
- Terminal with Double Screws, zinc plated
- Glow wire Index: 850° C
- UL-94 V-2 Flame retardant material

PINS POSITION


6h

PRODUCT SPECIFICATION			
SR.NO.	PARAMETER		SPECIFICATION
1	Industrial Panel Mount Socket		16A, 5 Pin (3P+ N+ E)
2	V/A Rating		16A, 200V/346V-250V/415C AC, 50 - 60Hz
3	Insulation Resistance At 500 V DC		100 M ohms min.
4	H.V.Break Down Test (For 1-Minute)		2 KV AC
5	Terminals		Screw-type
6	Applicable Cable Sizes		1.5 - 2.5 Sqmm
7	Earth Position		6h
8	Plug Angle		20°
9	Permissible Temp.	a. With/Without Load	-25°C TO +90°C
10	Material	a. Body	Polyamide , V2
		b. Terminals	Copper Alloy
		c. Terminal screws	MS, Zinc Plated
11	Torque	a. Tightening Torque for Screw	0.9 Nm Max.
		b. Tightening Torque for Cable Gland	NA
12	IP Protection type		IP67
13	Reference Standard		IEC/EN 60309-1, IEC/EN 60309-2, UL-1686
14	Compliance Marking		CE, RoHS Complied
15	Weight		260 gm (Approximate)


						PRODUCT :- Industrial Panel Mount Socket			CODE : 1576										
						APP	29.01.2024	GJG	 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com										
						CHK	29.01.2024	SRK											
						DRN	29.01.2024	VAK											
REV	IS	WAS	DATE	SIGN	APP	BY	DATE	SIGN											
UNSP.TOLERANCE		DIMNS. IN	WT(Gm)	SCALE:-		PROJECTION	SHEET	DRAWING NUMBER											
OVER	-	1	10	mm	Max.	NTS.		1	OF	1	REVISION								
UP TO	1	10	-														0	0	0
±	0.3	0.5	1.0								R0								

16A Straight Socket - 5Pin_200V/346V-250V/415V_6h_IP67

BASIC DIMENSIONS

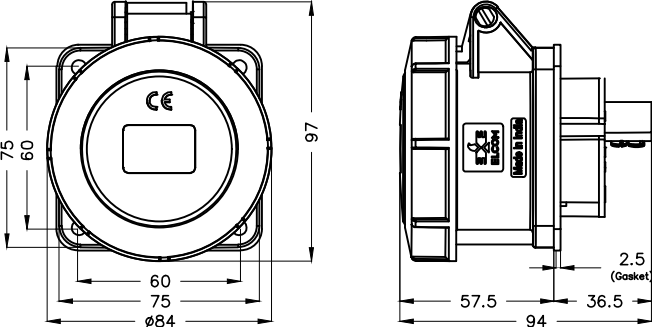

PANEL CUTOUT






PRODUCT OVERVIEW

- IP67
- High impact & heat resistant Polyamide material
- Color coding as per Voltage
- Terminal with Double Screws, zinc plated
- Glow wire Index: 850° C
- UL-94 V-2 Flame retardant material

PINS POSITION



PRODUCT SPECIFICATION			
SR.NO.	PARAMETER		SPECIFICATION
1	Panel Mount Straight Socket Type		16A, 5 Pin (3P+ N+ E)
2	V/A Rating		16A, 200V/346V-250V/415V AC, 50 - 60Hz
3	Insulation Resistance At 500 V DC		100 M ohms min.
4	H.V.Break Down Test (For 1-Minute)		2 KV AC
5	Terminals		Screw-type
6	Applicable Cable Sizes		1.5 - 2.5 Sq. mm
7	Earth Position		6h
8	Plug Angle		Straight
9	Permissible Temp.	a. With/Without Load	-25°C TO +90°C
10	Material	a. Body	Polyamide , V2
		b. Terminals	Copper Alloy
		c. Terminal screws	MS, Zinc Plated
11	Torque	a. Tightening Torque for Screw	0.9 Nm Max.
12	IP Protection type		IP44
13	Reference Standard		IEC 60309-1, IEC 60309-2, UL-1686
14	Compliance Marking		CE, RoHS Complied
15	Weight		233 gm (Approximate)

PRODUCT :- Industrial Panel Mount Straight Socket						CODE : 1577	
APP 29.01.2024 GJG						 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com	
CHK 29.01.2024 SRK							
D1	Datasheet Updated	08.09.23	SRK	VAS	DRN	29.01.2024	SRK
REV	IS	WAS	DATE	SIGN	APP	BY	SIGN
UNSP.TOLERANCE		DIMNS. IN	WT(Gm)	SCALE:-	PROJECTION	SHEET	DRAWING NUMBER
OVER	-	1	10	mm	Max.	NTS.	
UP TO	1	10	-	Moulding, plating details as per Bill of Material			
±	0.3	0.5	1.0	Unspecified colour is Black, GF:Glass filled.			
1 OF 1						0	0
						0	0
						0	0
						0	1
						5	7
						7	7
						REVISION	
						R0	


F:ENG-08.00

Note: Technical specifications are subject to change without prior notice

For Disposal of Product /Packing please refer note available on www.elcom-in.com

Copyright © 2024 by Elcom International Pvt.Ltd, India. All rights reserved

32A Panel Mount Socket - 3Pin_200V-250V_6h_IP67

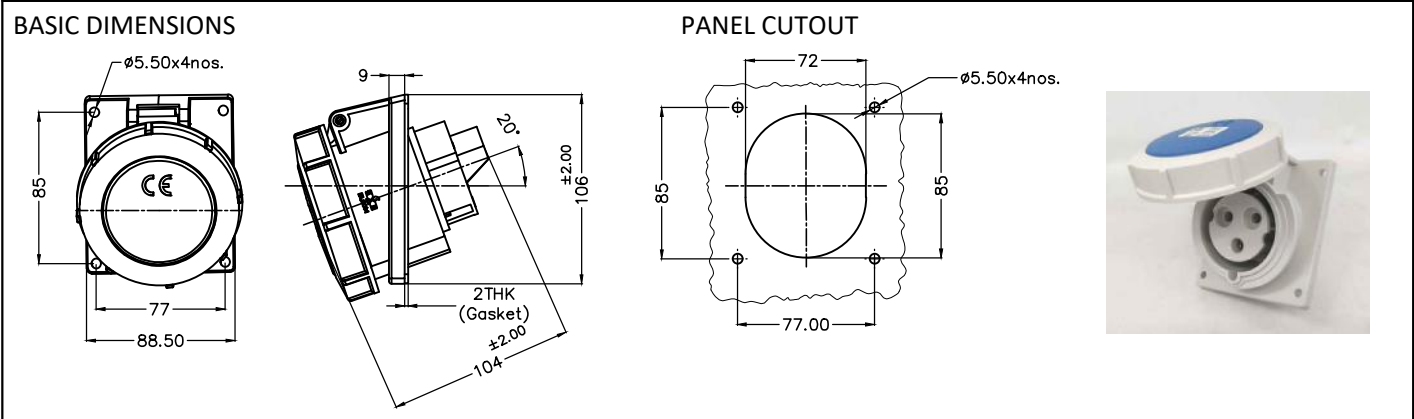


PRODUCT OVERVIEW

- IP67
- High impact & heat resistant Polyamide material
- Color coding as per Voltage
- Terminal with Double Screws, zinc plated
- Glow wire Index: 850° C
- UL-94 V-2 Flame retardant material


PINS POSITION

PRODUCT SPECIFICATION			
SR.NO.	PARAMETER		SPECIFICATION
1	Industrial Panel Mount Socket		32A, 3 Pin (2P+ E)
2	V/A Rating		32A, 200-250 VAC, 50 - 60Hz
3	Insulation Resistance At 500 V DC		100 M ohms min.
4	H.V.Break Down Test (For 1-Minute)		2 KV AC
5	Terminals		Screw-type
6	Applicable Cable Sizes		4 - 6 Sq mm
7	Earth Position		6h
8	Plug Angle		20°
9	Permissible Temp.	a. With/Without Load	-25°C TO +90°C
10	Material	a. Body	Polyamide , V2
		b. Terminals	Copper Alloy
		c. Terminal screws	MS, Zinc Plated
11	Torque	a. Tightening Torque for Screw	0.9 Nm Max.
12	IP Protection type		IP67
13	Reference Standard		IEC/EN 60309-1, IEC/EN 60309-2, UL-1686
14	Compliance Marking		CE, RoHS Complied
15	Weight		300 gm (Approximate)


						PRODUCT :- Industrial Panel Mount Socket			CODE : 3376							
						APP	29.01.2024	GJG	 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com							
						CHK	29.01.2024	SRK								
						DRN	29.01.2024	VAK								
REV	IS	WAS	DATE	SIGN	APP	BY	DATE	SIGN								
UNSP.TOLERANCE		DIMNS. IN	WT(Gm)	SCALE:-		PROJECTION	SHEET	DRAWING NUMBER								
OVER	-	1	10	mm	Max.	NTS.		1 OF 1	000003376 REVISION R0							
UP TO	1	10	-													
±	0.3	0.5	1.0													

32A Straight Socket - 3Pin_200V-250V_6h_IP67

BASIC DIMENSIONS

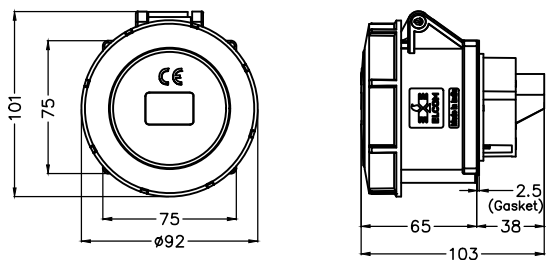


PANEL CUTOUT



PRODUCT OVERVIEW


- IP67
- High impact & heat resistant Polyamide material
- Color coding as per Voltage
- Terminal with Double Screws, zinc plated
- Glow wire Index: 850° C
- UL-94 V-2 Flame retardant material

PINS POSITION




PRODUCT SPECIFICATION

SR.NO.	PARAMETER		SPECIFICATION
1	Panel Mount Straight Socket Type		32A, 3 Pin (2P+ E)
2	V/A Rating		32A, 200-250 VAC, 50 - 60Hz
3	Insulation Resistance At 500 V DC		100 M ohms min.
4	H.V.Break Down Test (For 1-Minute)		2 KV AC
5	Terminals		Screw-type
6	Applicable Cable Sizes		4 - 6 Sqmm
7	Earth Position		6h
8	Plug Angle		Straight
9	Permissible Temp.	a. With/Without Load	-25°C TO +90°C
10	Material	a. Body	Polyamide , V2
		b. Terminals	Copper Alloy
		c. Terminal screws	MS, Zinc Plated
11	Torque	a. Tightening Torque for Screw	0.9 Nm Max.
12	IP Protection type		IP67
13	Reference Standard		IEC 60309-1, IEC 60309-2, UL-1686
14	Compliance Marking		CE, RoHS Complied
15	Weight		232 gm (Approximate)


						PRODUCT :- Industrial Panel Mount Straight Socket			CODE : 3377										
						APP	29.01.2024	GJG	 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com										
						CHK	29.01.2024	SRK											
						DRN	29.01.2024	SRK											
REV	IS	WAS	DATE	SIGN	APP	BY	DATE	SIGN											
UNSP.TOLERANCE				DIMNS. IN	WT(Gm)	SCALE:-		PROJECTION	SHEET	DRAWING NUMBER									
OVER	-	1	10	mm	Max.	NTS.			1 OF 1	0	0	0	0	3	3	7	7	REVISION	
UP TO	1	10	-	Moulding, plating details as per Bill of Material Unspecified colour is Black, GF:Glass filled.															
±	0.3	0.5	1.0																

32A Panel Mount Socket - 5Pin_200V/346V-250V/415V_6h_IP67

BASIC DIMENSIONS

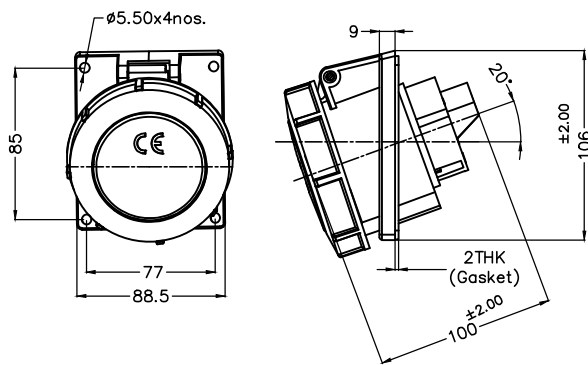


PANEL CUTOUT

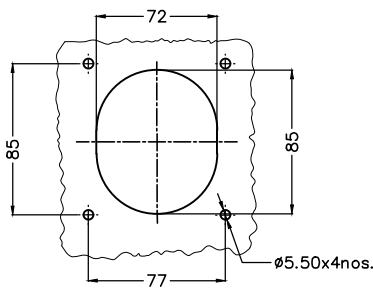

PRODUCT OVERVIEW


- IP67
- High impact & heat resistant Polyamide material
- Color coding as per Voltage
- Terminal with Double Screws, zinc plated
- Glow wire Index: 850° C
- UL-94 V-2 Flame retardant material

PINS POSITION




PRODUCT SPECIFICATION

SR.NO.	PARAMETER		SPECIFICATION
1	Industrial Panel Mount Socket		32A, 5 Pin (3P+ N+ E)
2	V/A Rating		32A, 200V/346V-250V/415C AC, 50 - 60Hz
3	Insulation Resistance At 500 V DC		100 M ohms min.
4	H.V.Break Down Test (For 1-Minute)		2 KV AC
5	Terminals		Screw-type
6	Applicable Cable Sizes		4 - 6 Sq mm
7	Earth Position		6h
8	Plug Angle		Straight
9	Permissible Temp.	a. With/Without Load	-25°C TO +90°C
10	Material	a. Body	Polyamide , V2
		b. Terminals	Copper Alloy
		c. Terminal screws	MS, Zinc Plated
11	Torque	a. Tightening Torque for Screw	0.9 Nm Max.
12	IP Protection type		IP67
13	Reference Standard		IEC/EN 60309-1, IEC/EN 60309-2, UL-1686
14	Compliance Marking		CE, RoHS Complied
15	Weight		350 gm (Approximate)


						PRODUCT :- Industrial Panel Mount Socket				CODE : 3576															
						APP			 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com																
						CHK																			
						DRN																			
REV	IS		WAS		DATE	SIGN	APP	BY	DATE	SIGN															
UNSP.TOLERANCE				DIMNS. IN		WT(Gm)		SCALE:-		PROJECTION		SHEET		DRAWING NUMBER											
OVER	-	1	10	mm		Max.		NTS.				1 OF 1		E	0	0	0	0	3	5	7	6	REVISION		
UP TO	1	10	-																					R0	
±	0.3	0.5	1.0																						

32A Straight Socket - 5Pin_200V/346V-250V/415V_6h_IP67

BASIC DIMENSIONS

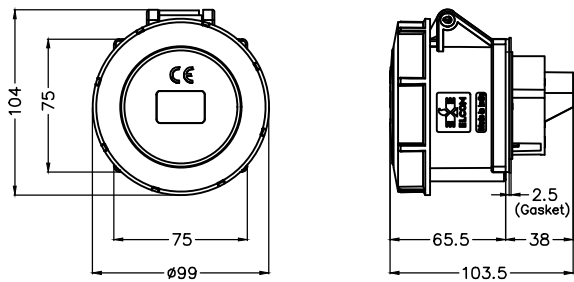


PANEL CUTOUT



PRODUCT OVERVIEW


- IP67
- High impact & heat resistant Polyamide material
- Color coding as per Voltage
- Terminal with Double Screws, zinc plated
- Glow wire Index: 850° C
- UL-94 V-2 Flame retardant material

PINS POSITION





PRODUCT SPECIFICATION

SR.NO.	PARAMETER		SPECIFICATION
1	Panel Mount Straight Socket Type		32A, 5 Pin (3P+ N+ E)
2	V/A Rating		32A, 200V/346V-250V/415V AC, 50 - 60Hz
3	Insulation Resistance At 500 V DC		100 M ohms min.
4	H.V.Break Down Test (For 1-Minute)		2 KV AC
5	Terminals		Screw-type
6	Applicable Cable Sizes		4 - 6 Sqmm
7	Earth Position		6h
8	Plug Angle		Straight
9	Permissible Temp.	a. With/Without Load	-25°C TO +90°C
10	Material	a. Body	Polyamide , V2
		b. Terminals	Copper Alloy
		c. Terminal screws	MS, Zinc Plated
11	Torque	a. Tightening Torque for Screw	0.9 Nm Max.
12	IP Protection type		IP67
13	Reference Standard		IEC 60309-1, IEC 60309-2, UL-1686
14	Compliance Marking		CE, RoHS Complied
15	Weight		330 gm (Approximate)

						PRODUCT :- Industrial Panel Mount Straight Socket			CODE : 3577										
						APP	29.01.2024	GJG	 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com										
						CHK	29.01.2024	SRK											
						DRN	29.01.2024	SRK											
REV	IS	WAS	DATE	SIGN	APP	BY	DATE	SIGN											
UNSP.TOLERANCE			DIMNS. IN	WT(Gm)	SCALE:-		PROJECTION	SHEET	DRAWING NUMBER										
OVER	-	1	10	mm	Max.			1 OF 1	0	0	0	0	0	3	5	7	7	REVISION	
UP TO	1	10	-	Moulding, plating details as per Bill of Material Unspecified colour is Black, GF:Glass filled.															
±	0.3	0.5	1.0																
																		R0	

63A Panel Mount Socket - 5 Pin_ 200V/346V-240V/415V_6h_IP67


BASIC DIMENSIONS

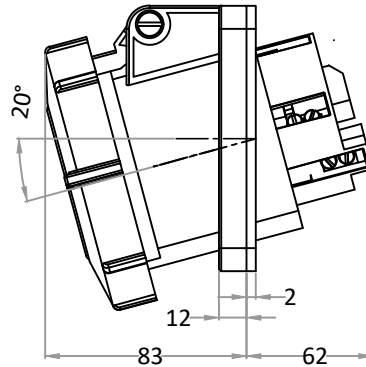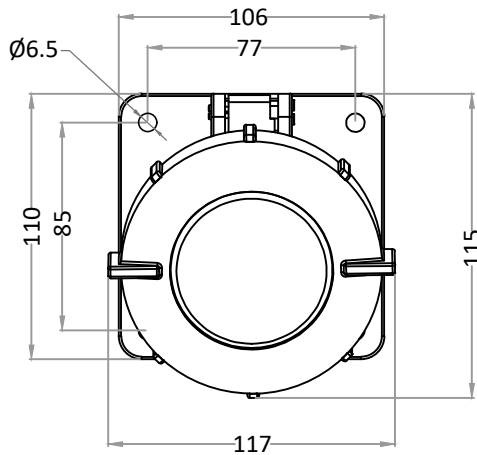


PRODUCT OVERVIEW

- IP67
- High impact & heat resistant Polyamide Material
- Color coding as per Voltage
- Brass Terminals with Zinc Plated Double Screws

PANEL CUT OUT



PINS POSITION



PRODUCT SPECIFICATION

SR. NO.	PARAMETER		SPECIFICATION
1	Industrial Socket Type		63A, 5 Pin (3P + N + E)
2	V/A Rating		63A, 200V/346V - 240V/415V AC, 50-60Hz
3	Insulation Resistance At 500 V DC		100 M ohms min.
4	H.V.Break Down Test (For 1 Minute)		2 KV AC
5	Terminals		Screw Type
6	Applicable Cable Size		10-16 sqmm
7	Earth Position		6h
8	Socket Angle		Angled (20°)
9	Permissible Temperature		-20°C to +80°C
10	Material	Body	Polyamide
		Terminals	Brass
		Terminal Screw	MS, Zinc Plated
11	IP Protection Type		IP 67
12	Reference Standard		IEC/EN 60309-1, IEC/EN 60309-2, UL-1686
13	Compliance Marking		CE
14	Weight		720 gms (Approximate)

							PRODUCT :- Industrial Panel Mount Socket			CODE : 6576											
							APP	06-02-2024	GJG			 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com									
							CHK	06-02-2024	SRK												
							DRN	06-02-2024	RLP												
REV	IS		WAS		DATE	SIGN	APP	BY	DATE	SIGN											
UNSP.TOLERANCE				DIMNS. IN		WT(Gm)		SCALE:-		PROJECTION  SHEET 1 OF 1		DRAWING NUMBER									
OVER	-	1	10	mm		Max.		NTS.				000006576 REVISION R0									
UP TO		1	10	-		Moulding, plating details as per Bill of Material Unspecified colour is Black. GF:Glass filled.															
+	0.3	0.5	1.0																		

F:ENG-08.00




Note: Technical specifications are subject to change without prior notice

For Disposal of Product /Packing please refer note available on www.elcom-in.com

Copyright © 2024 by Elcom International Pvt.Ltd, India. All rights reserved

63A Panel Mount Straight Socket - 5 Pin_ 200V/346V-240V/415V_6h_IP67

BASIC DIMENSIONS




PANEL CUT OUT

PRODUCT OVERVIEW


- IP67
- High impact & heat resistant Polyamide Material
- Color coding as per Voltage
- Brass Terminals with Zinc Plated Double Screws

PINS POSITION



PRODUCT SPECIFICATION

SR. NO.	PARAMETER		SPECIFICATION
1	Industrial Socket Type		63A, 5 Pin (3P + N + E)
2	V/A Rating		63A, 200V/346V - 240V/415V AC, 50-60Hz
3	Insulation Resistance At 500 V DC		100 M ohms min.
4	H.V.Break Down Test (For 1 Minute)		2 KV AC
5	Terminals		Screw Type
6	Applicable Cable Size		10-16 sqmm
7	Earth Position		6h
8	Socket Angle		Straight
9	Permissible Temperature		-20°C to+80°C
10	Material	Body	Polyamide
		Terminals	Brass
		Terminal Screw	MS, Zinc Plated
11	IP Protection Type		IP 67
12	Reference Standard		IEC/EN 60309-1,IEC/EN 60309-2,UL- 1686
13	Compliance Marking		CE
14	Weight		720 gms (Approximate)

							PRODUCT :- Industrial Panel Mount Socket			CODE : 6577								
							APP	06-02-2024	GJG	 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com								
							CHK	06-02-2024	SRK									
							DRN	06-02-2024	RLP									
REV	IS	WAS	DATE	SIGN	APP	BY	DATE	SIGN										
UNSP.TOLERANCE				DIMNS. IN	WT(Gm)	SCALE:-		PROJECTION	SHEET	DRAWING NUMBER								
OVER	-	1	10	mm	Max.	NTS.			1 OF 1	0	0	0	0	6	5	7	7	REVISION
UP TO	1	10	-	Moulding, plating details as per Bill of Material Unspecified colour is Black. GF:Glass filled.														
+	0.3	0.5	1.0															R0

F:ENG-08.00

Copyright © 2024 by Elcom International Pvt.Ltd, India. All rights reserved

Note: Technical specifications are subject to change without prior notice

For Disposal of Product /Packing please refer note available on www.elcom-in.com