



16A 3Pin 200V-250V 6h IP44 Panel Mount Plug


BASIC DIMENSIONS

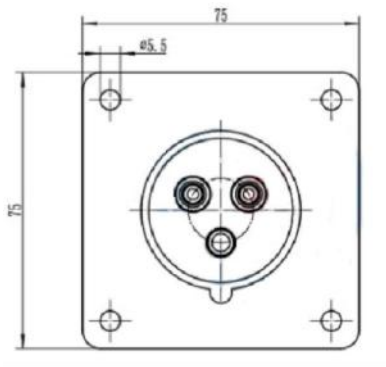


PRODUCT OVERVIEW

- IP44
- Color coding as per Voltage
- Terminals with Zinc plated Screws

PANEL CUTOUT




PIN POSITION



PRODUCT SPECIFICATION

SR. NO.	PARAMETER		SPECIFICATION
1	Panel Mount Plug		16A, 3 Pin (2P+ E)
2	V/A Rating		16A, 200-250 VAC, 50 - 60Hz
3	Insulation Resistance At 500 V DC		100 M ohms min.
4	H.V.Break Down Test (For 1-Minute)		2 KV AC
5	Terminals		Screw-type
6	Applicable Cable Sizes		1.5 - 2.5 Sq.mm
7	Earth Position		6h
8	Plug Angle		Straight
9	Permissible Temp.	a. With/Without Load	-20°C TO +80°C
10	Material	a. Body	Polyamide
		b. Terminals	Copper Alloy
		c. Terminal screws	MS, Zinc Plated
11	Torque	a. Tightening Torque for Screw	0.8 Nm Max.
12	IP Protection Type		IP44
13	Reference Standard		IEC/EN 60309-1, IEC/EN 60309-2, UL-1686
14	Compliance Marking		CE
15	Weight		73.10 gm (Approximate)

						PRODUCT :- Panel Mount Plug			CODE : 1343										
						APP	13.04.2024	GJG	 Plot E-4, Kagal Five Star MDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com										
						CHK	13.04.2024	SRK											
						DRN	13.04.2024	VAK											
REV	IS	WAS	DATE	SIGN	APP	BY	DATE	SIGN											
UNSP.TOLERANCE				DIMNS. IN	WT(Gm)	SCALE:-	PROJECTION	SHEET	DRAWING NUMBER										
OVER	-	1	10	mm	Max.	NTS.		1 OF 1	0	0	0	0	0	1	3	4	3	REVISION	
UP TO	1	10	-						0	0	0	0	1	3	4	3			
±	0.3	0.5	1.0														R0		

F:ENG-08.00



Copyright © 2024 by Elcom International Pvt.Ltd, India. All rights reserved

Note: Technical specifications are subject to change without prior notice

For Disposal of Product /Packing please refer note available on www.elcom-in.com

16A 5Pin 200V/346V-240V/415V 6h IP44 Panel Mount Plug


BASIC DIMENSIONS

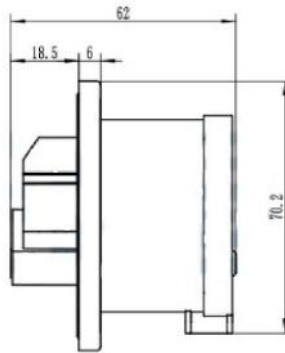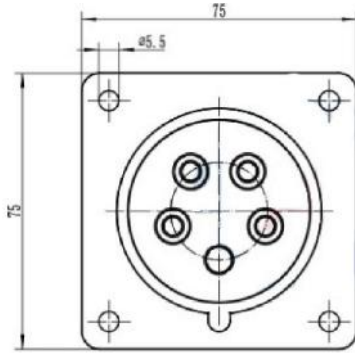


PRODUCT OVERVIEW

- IP44
- Color coding as per Voltage
- Terminals with Zinc plated Screws

PANEL CUTOUT




PIN POSITION




PRODUCT SPECIFICATION

SR. NO.	PARAMETER		SPECIFICATION
1	Panel Mount Plug		16A, 5 Pin (3P+N+ E)
2	V/A Rating		16A, 200V/346V-240V/415 VAC, 50 - 60Hz
3	Insulation Resistance At 500 V DC		100 M ohms min.
4	H.V.Break Down Test (For 1-Minute)		2 KV AC
5	Terminals		Screw-type
6	Applicable Cable Sizes		1.5 - 2.5 Sq.mm
7	Earth Position		6h
8	Plug Angle		Straight
9	Permissible Temp.	a. With/Without Load	-20°C TO +80°C
10	Material	a. Body	Polyamide
		b. Terminals	Copper Alloy
		c. Terminal screws	MS, Zinc Plated
11	Torque	a. Tightening Torque for Screw	0.8 Nm Max.
12	IP Protection Type		IP44
13	Reference Standard		IEC/EN 60309-1, IEC/EN 60309-2, UL-1686
14	Compliance Marking		CE
15	Weight		112 gm (Approximate)


						PRODUCT :- Panel Mount Plug			CODE : 1543										
						APP	13.04.2024	GJG	 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com										
						CHK	13.04.2024	SRK											
						DRN	13.04.2024	VAK											
REV	IS	WAS	DATE	SIGN	APP	BY	DATE	SIGN											
UNSP.TOLERANCE				DIMNS. IN	WT(Gm)	SCALE:-		PROJECTION	SHEET	DRAWING NUMBER									
OVER	-	1	10	mm	Max.	NTS.			1 OF 1	0	0	0	0	0	1	5	4	3	REVISION
UP TO	1	10	-							R0									
±	0.3	0.5	1.0																

32A 3Pin 200V-250V 6h IP44 Panel Mount Plug

BASIC DIMENSIONS

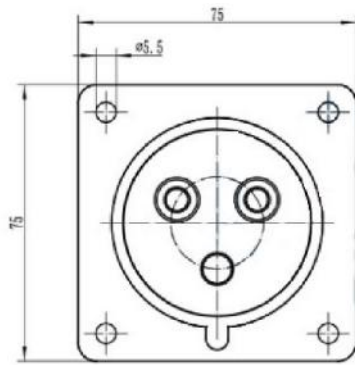


PANEL CUTOUT

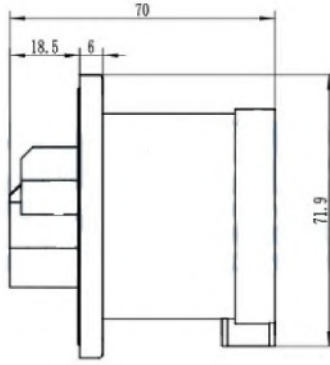


PRODUCT OVERVIEW

- IP44
- Color coding as per Voltage
- Terminal with Zinc plated Screws

PANEL CUTOUT




PIN POSITION





PRODUCT SPECIFICATION

SR. NO.	PARAMETER		SPECIFICATION
1	Panel Mount Plug		32A, 3 Pin (2P+ E)
2	V/A Rating		32A, 200-250 VAC, 50 - 60Hz
3	Insulation Resistance At 500 V DC		100 M ohms min.
4	H.V.Break Down Test (For 1-Minute)		2 KV AC
5	Terminals		Screw-type
6	Applicable Cable Sizes		4-6 Sq.mm
7	Earth Position		6h
8	Plug Angle		Straight
9	Permissible Temp.	a. With/Without Load	-20°C TO +80°C
10	Material	a. Body	Polyamide
		b. Terminals	Copper Alloy
		c. Terminal screws	MS, Zinc Plated
11	Torque	a. Tightening Torque for Screw	1.2 Nm Max.
12	IP Protection Type		IP44
13	Reference Standard		IEC/EN 60309-1, IEC/EN 60309-2, UL-1686
14	Compliance Marking		CE
15	Weight		108 gm (Approximate)

						PRODUCT :- Panel Mount Plug				CODE : 3343											
						APP	13.04.2024	GJG	 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com												
						CHK	13.04.2024	SRK													
						DRN	13.04.2024	VAK													
REV	IS	WAS	DATE	SIGN	APP	BY	DATE	SIGN													
UNSP.TOLERANCE				DIMNS. IN	WT(Gm)	SCALE:-		PROJECTION	SHEET	DRAWING NUMBER											
OVER	-	1	10	mm	Max.	NTS.			1 OF 1	0	0	0	0	0	3	3	4	3	REVISION		
UP TO	1	10	-															R0			
±	0.3	0.5	1.0																		

32A 5Pin 200V/346V-240V/415V 6h IP44 Panel Mount Plug


BASIC DIMENSIONS

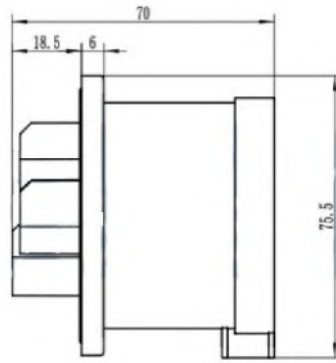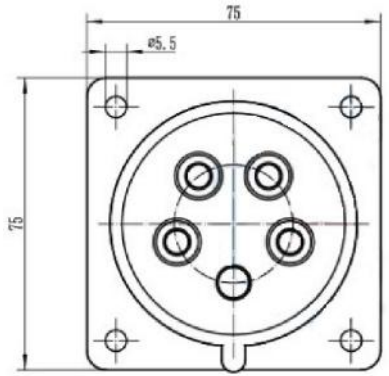


PRODUCT OVERVIEW

- IP44
- Color coding as per Voltage
- Terminal with Zinc plated Screws

PANEL CUTOUT




PIN POSITION



PRODUCT SPECIFICATION

SR. NO.	PARAMETER		SPECIFICATION
1	Panel Mount Plug		32A, 5 Pin (3P+N+ E)
2	V/A Rating		32A, 200V/346V-240V/415 VAC, 50 - 60Hz
3	Insulation Resistance At 500 V DC		100 M ohms min.
4	H.V.Break Down Test (For 1-Minute)		2 KV AC
5	Terminals		Screw-type
6	Applicable Cable Sizes		4-6 Sq.mm
7	Earth Position		6h
8	Plug Angle		Straight
9	Permissible Temp.	a. With/Without Load	-20°C TO +80°C
10	Material	a. Body	Polyamide
		b. Terminals	Copper Alloy
		c. Terminal screws	MS, Zinc Plated
11	Torque	a. Tightening Torque for Screw	1.2 Nm Max.
12	IP Protection Type		IP44
13	Reference Standard		IEC/EN 60309-1, IEC/EN 60309-2, UL-1686
14	Compliance Marking		CE
15	Weight		148 gm (Approximate)

						PRODUCT :- Panel Mount Plug			CODE : 3543											
						APP	13.04.2024	GJG	 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com											
						CHK	13.04.2024	SRK												
						DRN	13.04.2024	VAK												
REV	IS	WAS	DATE	SIGN	APP	BY	DATE	SIGN												
UNSP.TOLERANCE				DIMNS. IN	WT(Gm)	SCALE:-		PROJECTION	SHEET	DRAWING NUMBER										
OVER	-	1	10	mm	Max.	NTS.			1 OF 1	0	0	0	0	0	3	5	4	3	REVISION	
UP TO	1	10	-															R0		
±	0.3	0.5	1.0																	

F:ENG-08.00


Copyright © 2024 by Elcom International Pvt.Ltd, India. All rights reserved

Note: Technical specifications are subject to change without prior notice

For Disposal of Product /Packing please refer note available on www.elcom-in.com

63A 5Pin 200V/346V-240V/415V 6h IP44 Panel Mount Plug


BASIC DIMENSIONS

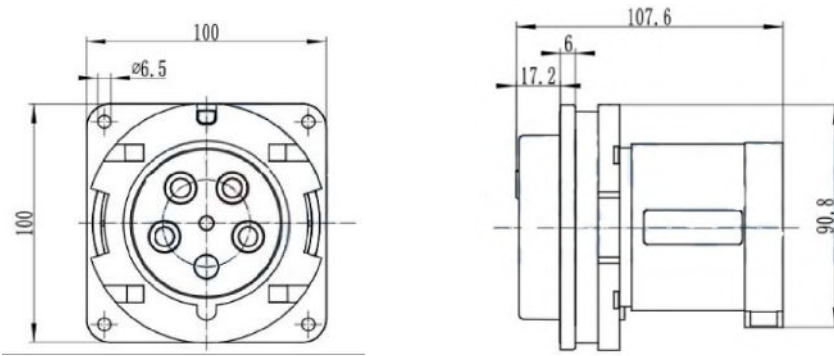


PRODUCT OVERVIEW

- IP44
- Color coding as per Voltage
- Nickel Plated Terminal with Zinc plated Double Screws

PANEL CUTOUT




PIN POSITION



PRODUCT SPECIFICATION

SR. NO.	PARAMETER		SPECIFICATION
1	Panel Mount Plug		63A, 5 Pin (3P+N+ E)
2	V/A Rating		63A, 200V/346V-240V/415 VAC, 50 - 60Hz
3	Insulation Resistance At 500 V DC		100 M ohms min.
4	H.V.Break Down Test (For 1-Minute)		2.5 KV AC
5	Terminals		Screw-type
6	Applicable Cable Sizes		10-16 Sq.mm
7	Earth Position		6h
8	Plug Angle		Straight
9	Permissible Temp.	a. With/Without Load	-20°C TO +80°C
10	Material	a. Body	Polyamide
		b. Terminals	Copper Alloy, Nickel Plated
		c. Terminal screws	MS, Zinc Plated
11	Torque	a. Tightening Torque for Screw	2.0 Nm Max.
12	IP Protection Type		IP44
13	Reference Standard		IEC/EN 60309-1, IEC/EN 60309-2, UL-1686
14	Compliance Marking		CE
15	Weight		455 gm (Approximate)

						PRODUCT :- Panel Mount Plug			CODE : 6543										
						APP	13.04.2024	GJG	 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com										
						CHK	13.04.2024	SRK											
						DRN	13.04.2024	VAK											
REV	IS	WAS	DATE	SIGN	APP	BY	DATE	SIGN											
UNSP.TOLERANCE				DIMNS. IN	WT(Gm)	SCALE:-	PROJECTION	SHEET	DRAWING NUMBER										
OVER	-	1	10	mm	Max.	NTS.		1 OF 1	0	0	0	0	0	0	6	5	4	3	REVISION
UP TO	1	10	-																
±	0.3	0.5	1.0																