
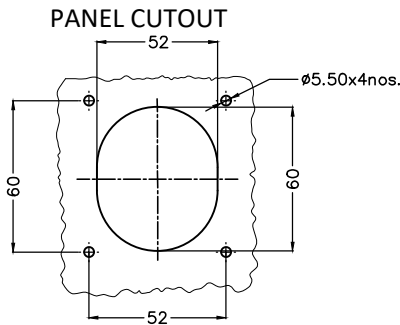



16A Panel Mount Socket - 3Pin_200V-250V_6h_IP44


BASIC DIMENSIONS



PRODUCT OVERVIEW

- IP44
- High impact & heat resistant Polyamide material
- Color coding as per Voltage
- Terminal with Double Screws, zinc plated
- Glow wire Index: 850° C
- UL-94 V-2 Flame retardant material

PINS POSITION




PRODUCT SPECIFICATION

SR.NO.	PARAMETER		SPECIFICATION
1	Industrial Panel Mount Socket		16A, 3 Pin (2P+ E)
2	V/A Rating		16A, 200-250 VAC, 50 - 60Hz
3	Insulation Resistance At 500 V DC		100 M ohms min.
4	H.V.Break Down Test (For 1-Minute)		2 KV AC
5	Terminals		Screw-type
6	Applicable Cable Sizes		1.5 - 2.5 Sqmm
7	Earth Position		6h
8	Plug Angle		20°
9	Permissible Temp.	a. With/Without Load	-25°C TO +90°C
10	Material	a. Body	Polyamide , V2
		b. Terminals	Copper Alloy
		c. Terminal screws	MS, Zinc Plated
11	Torque	a. Tightening Torque for Screw	0.9 Nm Max.
		b. Tightening Torque for Cable Gland	NA
12	IP Protection type		IP44
13	Reference Standard		IEC/EN 60309-1, IEC/EN 60309-2, UL-1686
14	Compliance Marking		CE, RoHS Complied
15	Weight		155 gm (Approximate)


						PRODUCT :-			CODE :						
						Industrial Panel Mount Socket			1346						
						APP	29.01.2024	GJG	 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com						
						CHK	29.01.2024	SRK							
						DRN	29.01.2024	VAK							
REV	IS	WAS	DATE	SIGN	APP	BY	DATE	SIGN							
UNSP.TOLERANCE			DIMNS. IN	WT(Gm)	SCALE:-		PROJECTION	SHEET	DRAWING NUMBER						
OVER	-	1	10	mm	Max.			1 OF 1	000001346						
UP TO	1	10	-												
±	0.3	0.5	1.0								R0				

16A Straight Socket - 3Pin_200V_250V_6h_IP44

BASIC DIMENSIONS

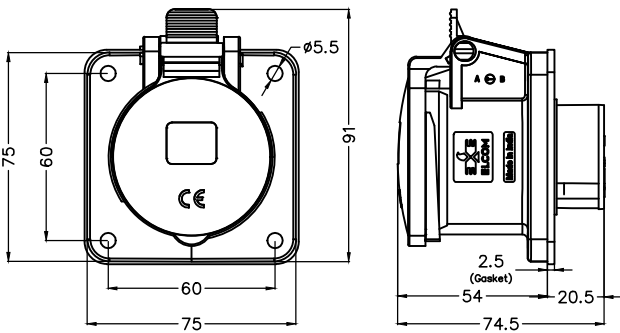


PANEL CUTOUT



PRODUCT OVERVIEW


- IP44
- High impact & heat resistant Polyamide material
- Color coding as per Voltage
- Terminal with Double Screws, zinc plated
- Glow wire Index: 850° C
- UL-94 V-2 Flame retardant material

PINS POSITION





PRODUCT SPECIFICATION

SR.NO.	PARAMETER		SPECIFICATION
1	Panel Mount Straight Socket Type		16A, 3 Pin (2P+ E)
2	V/A Rating		16A, 200-250 VAC, 50 - 60Hz
3	Insulation Resistance At 500 V DC		100 M ohms min.
4	H.V.Break Down Test (For 1-Minute)		2 KV AC
5	Terminals		Screw-type
6	Applicable Cable Sizes		1.5 - 2.5 Sq. mm
7	Earth Position		6h
8	Plug Angle		Straight
9	Permissible Temp.	a. With/Without Load	-25°C TO +90°C
10	Material	a. Body	Polyamide , V2
		b. Terminals	Copper Alloy
		c. Terminal screws	MS, Zinc Plated
11	Torque	a. Tightening Torque for Screw	0.9 Nm Max.
12	IP Protection type		IP44
13	Reference Standard		IEC 60309-1, IEC 60309-2, UL-1686
14	Compliance Marking		CE, RoHS Complied
15	Weight		168 gm (Approximate)


						PRODUCT :- Industrial Panel Mount Straight Socket			CODE : 1347			
						APP	29.01.2024	GJG	Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com			
						CHK	29.01.2024	SRK				
						DRN	29.01.2024	SRK				
REV	IS	WAS	DATE	SIGN	APP	BY	DATE	SIGN				
UNSP.TOLERANCE		DIMNS. IN		WT(Gm)		SCALE:-		PROJECTION	SHEET	DRAWING NUMBER		
OVER	-	1	10	mm		Max.			1 OF 1	0 0 0 0 0 1 3 4 7		
UP TO	1	10	-				REVISION					
±	0.3	0.5	1.0				R0					

16A Panel Mount Socket - 5Pin_200V/346V-250V/415V_6h_IP44

BASIC DIMENSIONS




PANEL CUTOUT

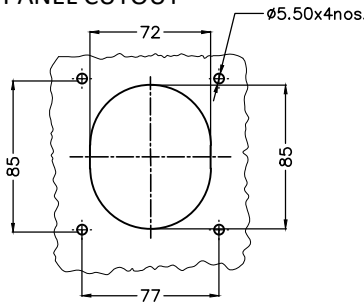

PRODUCT OVERVIEW


- IP44
- High impact & heat resistant Polyamide material
- Color coding as per Voltage
- Terminal with Double Screws, zinc plated
- Glow wire Index: 850° C
- UL-94 V-2 Flame retardant material

PINS POSITION




PRODUCT SPECIFICATION

SR.NO.	PARAMETER		SPECIFICATION
1	Industrial Panel Mount Socket		16A, 5 Pin (3P+ N+ E)
2	V/A Rating		16A, 200V/346V-250V/415C AC, 50 - 60Hz
3	Insulation Resistance At 500 V DC		100 M ohms min.
4	H.V.Break Down Test (For 1-Minute)		2 KV AC
5	Terminals		Screw-type
6	Applicable Cable Sizes		1.5 - 2.5 Sqmm
7	Earth Position		6h
8	Plug Angle		20°
9	Permissible Temp.	a. With/Without Load	-25°C TO +90°C
10	Material	a. Body	Polyamide , V2
		b. Terminals	Copper Alloy
		c. Terminal screws	MS, Zinc Plated
11	Torque	a. Tightening Torque for Screw	0.9 Nm Max.
		b. Tightening Torque for Cable Gland	NA
12	IP Protection type		IP44
13	Reference Standard		IEC/EN 60309-1, IEC/EN 60309-2, UL-1686
14	Compliance Marking		CE, RoHS Complied
15	Weight		245 gm (Approximate)


						PRODUCT :-				CODE :											
						Industrial Panel Mount Socket				1546											
						APP	29.01.2024	GJG	 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com												
						CHK	29.01.2024	SRK													
						DRN	29.01.2024	VAK													
REV	IS	WAS	DATE	SIGN	APP	BY	DATE	SIGN													
UNSP.TOLERANCE				DIMNS. IN	WT(Gm)	SCALE:-	PROJECTION	SHEET	DRAWING NUMBER												
OVER	-	1	10	mm	Max.	NTS.		1 OF 1	0	0	0	0	0	1	5	4	6	REVISION			
UP TO	1	10	-															R0			
±	0.3	0.5	1.0																		

16A Straight Socket - 5Pin_200V/346V-250V/415V_6h_IP44

BASIC DIMENSIONS

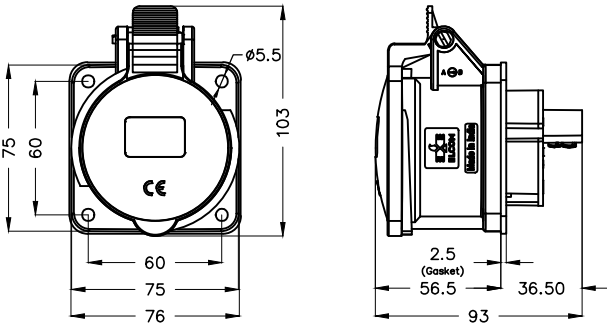

PANEL CUTOUT







PRODUCT OVERVIEW

- IP44
- High impact & heat resistant Polyamide material
- Color coding as per Voltage
- Terminal with Double Screws, zinc plated
- Glow wire Index: 850° C
- UL-94 V-2 Flame retardant material


PINS POSITION



PRODUCT SPECIFICATION			
SR.NO.	PARAMETER		SPECIFICATION
1	Panel Mount Straight Socket Type		16A, 5 Pin (3P+ N+ E)
2	V/A Rating		16A, 200V/346V-250V/415V AC, 50 - 60Hz
3	Insulation Resistance At 500 V DC		100 M ohms min.
4	H.V.Break Down Test (For 1-Minute)		2 KV AC
5	Terminals		Screw-type
6	Applicable Cable Sizes		1.5 - 2.5 Sq. mm
7	Earth Position		6h
8	Plug Angle		Straight
9	Permissible Temp.	a. With/Without Load	-25°C TO +90°C
10	Material	a. Body	Polyamide , V2
		b. Terminals	Copper Alloy
		c. Terminal screws	MS, Zinc Plated
11	Torque	a. Tightening Torque for Screw	0.9 Nm Max.
12	IP Protection type		IP44
13	Reference Standard		IEC 60309-1, IEC 60309-2, UL-1686
14	Compliance Marking		CE, RoHS Complied
15	Weight		225 gm (Approximate)

						PRODUCT :- Industrial Panel Mount Straight Socket			CODE : 1547				
						APP	29.01.2024	GJG	 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com				
						CHK	29.01.2024	SRK					
D1	Datasheet Updated		08.09.23	SRK	VAS	DRN	29.01.2024	SRK					
REV	IS	WAS	DATE	SIGN	APP	BY	DATE	SIGN					
UNSP.TOLERANCE				DIMNS. IN	WT(Gm)	SCALE:-		PROJECTION	SHEET	DRAWING NUMBER			
OVER	-	1	10	mm	Max.	NTS.			1 OF 1	0 0 0 0 0 0 1 5 4 7			REVISION
UP TO	1	10	-	Moulding, plating details as per Bill of Material Unspecified colour is Black, GF:Glass filled.									
±	0.3	0.5	1.0							R0			

32A Panel Mount Socket - 3Pin_200V-250V_6h_IP44

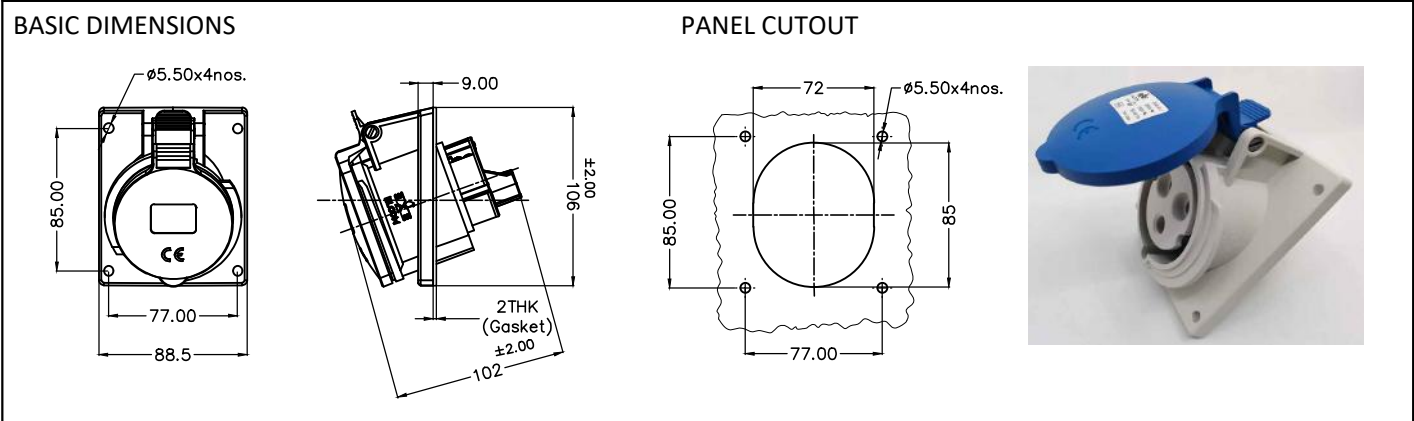

PRODUCT OVERVIEW

- IP44
- High impact & heat resistant Polyamide material
- Color coding as per Voltage
- Terminal with Double Screws, zinc plated
- Glow wire Index: 850° C
- UL-94 V-2 Flame retardant material

PINS POSITION


PRODUCT SPECIFICATION

SR.NO.	PARAMETER		SPECIFICATION
1	Industrial Panel Mount Socket		32A, 3 Pin (2P+ E)
2	V/A Rating		32A, 200-250 VAC, 50 - 60Hz
3	Insulation Resistance At 500 V DC		100 M ohms min.
4	H.V.Break Down Test (For 1-Minute)		2 KV AC
5	Terminals		Screw-type
6	Applicable Cable Sizes		4 - 6 Sq mm
7	Earth Position		6h
8	Plug Angle		20°
9	Permissible Temp.	a. With/Without Load	-25°C TO +90°C
10	Material	a. Body	Polyamide , V2
		b. Terminals	Copper Alloy
		c. Terminal screws	MS, Zinc Plated
11	Torque	a. Tightening Torque for Screw	0.9 Nm Max.
12	IP Protection type		IP44
13	Reference Standard		IEC/EN 60309-1, IEC/EN 60309-2, UL-1686
14	Compliance Marking		CE, RoHS Complied
15	Weight		280 gm (Approximate)


						PRODUCT :- Industrial Panel Mount Socket			CODE : 3346		
						APP	29.01.2024	GJG	 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com		
						CHK	29.01.2024	SRK			
						DRN	29.01.2024	VAK			
REV	IS	WAS	DATE	SIGN	APP	BY	DATE	SIGN			
UNSP.TOLERANCE		DIMNS. IN mm	WT(Gm) Max.	SCALE:-			SHEET 1 OF 1	DRAWING NUMBER			
OVER	-			1	10			0 0 0 0 0 3 3 4 6			
UP TO	1			10	-						
±	0.3	0.5	1.0					REVISION R0			

32A Straight Socket - 3Pin_200V-250V_6h_IP44

BASIC DIMENSIONS

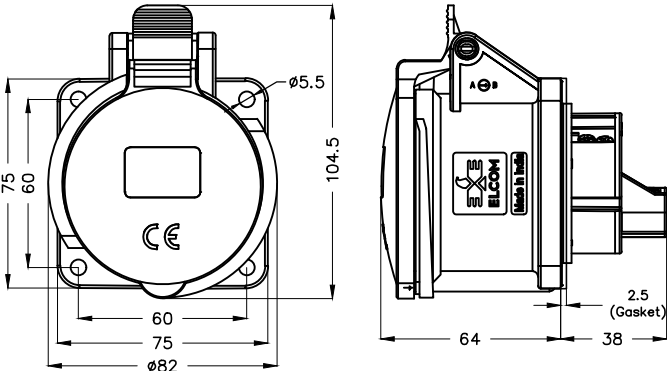

PANEL CUTOUT






PRODUCT OVERVIEW


- IP44
- High impact & heat resistant Polyamide material
- Color coding as per Voltage
- Terminal with Double Screws, zinc plated
- Glow wire Index: 850° C
- UL-94 V-2 Flame retardant material

PINS POSITION




PRODUCT SPECIFICATION

SR.NO.	PARAMETER		SPECIFICATION
1	Panel Mount Straight Socket Type		32A, 3 Pin (2P+ E)
2	V/A Rating		32A, 200-250 VAC, 50 - 60Hz
3	Insulation Resistance At 500 V DC		100 M ohms min.
4	H.V.Break Down Test (For 1-Minute)		2 KV AC
5	Terminals		Screw-type
6	Applicable Cable Sizes		4 - 6 Sqmm
7	Earth Position		6h
8	Plug Angle		Straight
9	Permissible Temp.	a. With/Without Load	-25°C TO +90°C
10	Material	a. Body	Polyamide , V2
		b. Terminals	Copper Alloy
		c. Terminal screws	MS, Zinc Plated
11	Torque	a. Tightening Torque for Screw	0.9 Nm Max.
12	IP Protection type		IP44
13	Reference Standard		IEC 60309-1, IEC 60309-2, UL-1686
14	Compliance Marking		CE, RoHS Complied
15	Weight		232 gm (Approximate)

						PRODUCT :- Industrial Panel Mount Straight Socket			CODE : 3347				
						APP	29.01.2024	GJG	 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com				
						CHK	29.01.2024	SRK					
						DRN	29.01.2024	SRK					
REV	IS	WAS	DATE	SIGN	APP	BY	DATE	SIGN					
UNSP.TOLERANCE				DIMNS. IN	WT(Gm)	SCALE:-		PROJECTION	SHEET	DRAWING NUMBER			
OVER	-	1	10			Max.			1 OF 1	00000347			REVISION
UP TO	1	10	-	Moulding, plating details as per Bill of Material Unspecified colour is Black, GF:Glass filled.									
±	0.3	0.5	1.0								R0		


32A Panel Mount Socket - 5Pin_200V/346V-250V/415V_6h_IP44

BASIC DIMENSIONS

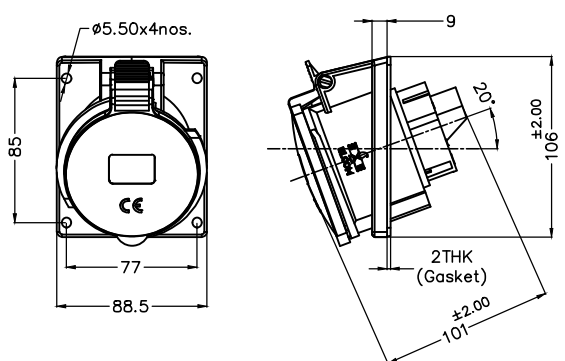

Front view dimensions: $\phi 5.50 \times 4$ nos., 85, 77, 88.5. Side view dimensions: 9, 20, ± 2.00 , 106, 2 THK (Gasket), ± 2.00 , 101.

PANEL CUTOUT

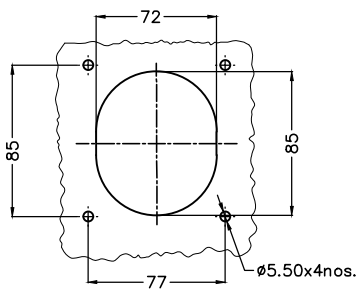


Panel cutout dimensions: 72, 85, 77, $\phi 5.50 \times 4$ nos.



PRODUCT OVERVIEW


- IP44
- High impact & heat resistant Polyamide material
- Color coding as per Voltage
- Terminal with Double Screws, zinc plated
- Glow wire Index: 850° C
- UL-94 V-2 Flame retardant material

PINS POSITION




6h 

PRODUCT SPECIFICATION			
SR.NO.	PARAMETER		SPECIFICATION
1	Industrial Panel Mount Socket		32A, 5 Pin (3P+ N+ E)
2	V/A Rating		32A, 200V/346V-250V/415C AC, 50 - 60Hz
3	Insulation Resistance At 500 V DC		100 M ohms min.
4	H.V.Break Down Test (For 1-Minute)		2 KV AC
5	Terminals		Screw-type
6	Applicable Cable Sizes		4 - 6 Sq mm
7	Earth Position		6h
8	Plug Angle		20°
9	Permissible Temp.	a. With/Without Load	-25°C TO +90°C
10	Material	a. Body	Polyamide , V2
		b. Terminals	Copper Alloy
		c. Terminal screws	MS, Zinc Plated
11	Torque	a. Tightening Torque for Screw	0.9 Nm Max.
12	IP Protection type		IP44
13	Reference Standard		IEC/EN 60309-1, IEC/EN 60309-2, UL-1686
14	Compliance Marking		CE, RoHS Complied
15	Weight		330 gms (Approximate)


						PRODUCT :- Industrial Panel Mount Socket			CODE : 3546										
						APP	29.01.2024	GJG	 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com										
						CHK	29.01.2024	SRK											
						DRN	29.01.2024	VAK											
REV	IS	WAS	DATE	SIGN	APP	BY	DATE	SIGN											
UNSP.TOLERANCE				DIMNS. IN	WT(Gm)	SCALE:-		PROJECTION	SHEET	DRAWING NUMBER									
OVER	-	1	10	mm	Max.	NTS.			1 OF 1	0	0	0	0	0	3	5	4	6	REVISION
UP TO	1	10	-							R0									
±	0.3	0.5	1.0																

32A Straight Socket - 5Pin_200V/346V-250V/415V_6h_IP44

BASIC DIMENSIONS

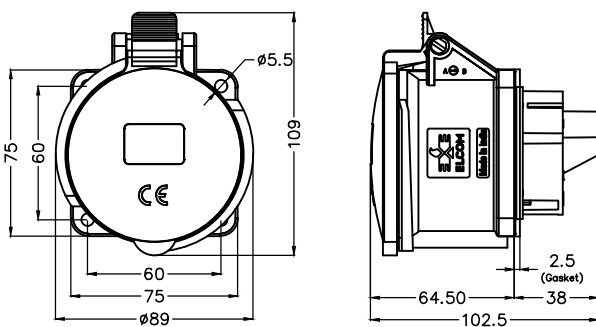

PANEL CUTOUT







PRODUCT OVERVIEW

- IP44
- High impact & heat resistant Polyamide material
- Color coding as per Voltage
- Terminal with Double Screws, zinc plated
- Glow wire Index: 850° C
- UL-94 V-2 Flame retardant material

PINS POSITION





PRODUCT SPECIFICATION			
SR.NO.	PARAMETER		SPECIFICATION
1	Panel Mount Straight Socket Type		32A, 5 Pin (3P+ N+ E)
2	V/A Rating		32A, 200V/346V-250V/415V AC, 50 - 60Hz
3	Insulation Resistance At 500 V DC		100 M ohms min.
4	H.V.Break Down Test (For 1-Minute)		2 KV AC
5	Terminals		Screw-type
6	Applicable Cable Sizes		4 - 6 Sqmm
7	Earth Position		6h
8	Plug Angle		Straight
9	Permissible Temp.	a. With/Without Load	-25°C TO +90°C
10	Material	a. Body	Polyamide , V2
		b. Terminals	Copper Alloy
		c. Terminal screws	MS, Zinc Plated
11	Torque	a. Tightening Torque for Screw	0.9 Nm Max.
12	IP Protection type		IP44
13	Reference Standard		IEC 60309-1, IEC 60309-2, UL-1686
14	Compliance Marking		CE, RoHS Complied
15	Weight		322 gm (Approximate)


						PRODUCT :- Industrial Panel Mount Straight Socket			CODE : 3547														
						APP	29.01.2024	GJG	 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com														
						CHK	29.01.2024	SRK															
						DRN	29.01.2024	SRK															
REV	IS	WAS	DATE	SIGN	APP	BY	DATE	SIGN															
UNSP.TOLERANCE		DIMNS. IN		WT(Gm)		SCALE:-			SHEET 1 OF 1	DRAWING NUMBER													
OVER	-	1	10	mm		Max.				NTS.													
UP TO	1	10	-	Moulding, plating details as per Bill of Material Unspecified colour is Black, GF:Glass filled.								0	0	0	0	0	3	5	4	7	REVISION		
±	0.3	0.5	1.0									R0											

63A Panel Mount Socket - 5 Pin_ 200V/346V-240V/415V_6h_IP44

BASIC DIMENSIONS




PANEL CUT OUT




PRODUCT OVERVIEW

- IP44
- High impact & heat resistant Polyamide Material
- Color coding as per Voltage
- Brass Terminals with Zinc Plated Double Screws

PANEL CUT OUT




PINS POSITION



PRODUCT SPECIFICATION

SR. NO.	PARAMETER		SPECIFICATION
1	Industrial Socket Type		63A, 5 Pin (3P + N + E)
2	V/A Rating		63A, 200V/346V - 240V/415V AC, 50-60Hz
3	Insulation Resistance At 500 V DC		100 M ohms min.
4	H.V.Break Down Test (For 1 Minute)		2 KV AC
5	Terminals		Screw Type
6	Applicable Cable Size		10-16 sqmm
7	Earth Position		6h
8	Socket Angle		Angled (20°)
9	Permissible Temperature		-20°C to+80°C
10	Material	Body	Polyamide
		Terminals	Brass
		Terminal Screw	MS, Zinc Plated
11	IP Protection Type		IP44
12	Reference Standard		IEC/EN 60309-1,IEC/EN 60309-2,UL-1686
13	Compliance Marking		CE
14	Weight		670 gms (Approximate)

							PRODUCT :- Industrial Panel Mount Socket			CODE : 6546									
							APP	06-02-2024	GJG	 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com									
							CHK	06-02-2024	SRK										
							DRN	06-02-2024	RLP										
REV	IS	WAS	DATE	SIGN	APP	BY	DATE	SIGN											
UNSP.TOLERANCE				DIMNS. IN	WT(Gm)	SCALE:-		PROJECTION	SHEET	DRAWING NUMBER									
OVER	-	1	10	mm	Max.	NTS.			1 OF 1	0	0	0	0	0	6	5	4	6	REVISION
UP TO	1	10	-	Moulding, plating details as per Bill of Material Unspecified colour is Black. GF:Glass filled.															
+	0.3	0.5	1.0																
										R0									

F:ENG-08.00




Copyright © 2024 by Elcom International Pvt.Ltd, India. All rights reserved

Note: Technical specifications are subject to change without prior notice

For Disposal of Product /Packing please refer note available on www.elcom-in.com

63A Panel Mount Straight Socket - 5 Pin_ 200V/346V-240V/415V_6h_IP44

BASIC DIMENSIONS




PANEL CUT OUT



PRODUCT OVERVIEW


- IP44
- High impact & heat resistant Polyamide Material
- Color coding as per Voltage
- Brass Terminals with Zinc Plated Double Screws

PINS POSITION



PRODUCT SPECIFICATION

SR. NO.	PARAMETER		SPECIFICATION
1	Industrial Socket Type		63A, 5 Pin (3P + N + E)
2	V/A Rating		63A, 200V/346V - 240V/415V AC, 50-60Hz
3	Insulation Resistance At 500 V DC		100 M ohms min.
4	H.V.Break Down Test (For 1 Minute)		2 KV AC
5	Terminals		Screw Type
6	Applicable Cable Size		10-16 sqmm
7	Earth Position		6h
8	Socket Angle		Straight
9	Permissible Temperature		-20°C to +80°C
10	Material	Body	Polyamide
		Terminals	Brass
		Terminal Screw	MS, Zinc Plated
11	IP Protection Type		IP44
12	Reference Standard		IEC/EN 60309-1, IEC/EN 60309-2, UL-1686
13	Compliance Marking		CE
14	Weight		670 gms (Approximate)

						PRODUCT :- Industrial Panel Mount Socket			CODE : 6547										
						APP	06-02-2024	GJG			 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com								
						CHK	06-02-2024	SRK											
						DRN	06-02-2024	RLP											
REV	IS		WAS		DATE	SIGN	APP	BY	DATE	SIGN									
UNSP.TOLERANCE				DIMNS. IN mm		WT(Gm) Max.		SCALE:- NTS.		PROJECTION 		SHEET 1 OF 1		DRAWING NUMBER 000006547					
OVER	-	1	10		Moulding, plating details as per Bill of Material Unspecified colour is Black, GF:Glass filled.							REVISION R0							
UP TO	1	10		-															
±	0.3	0.5	1.0																