


16A 3 Pin 200V - 250V 6h IP67 Surface Mount Socket


BASIC DIMENSIONS

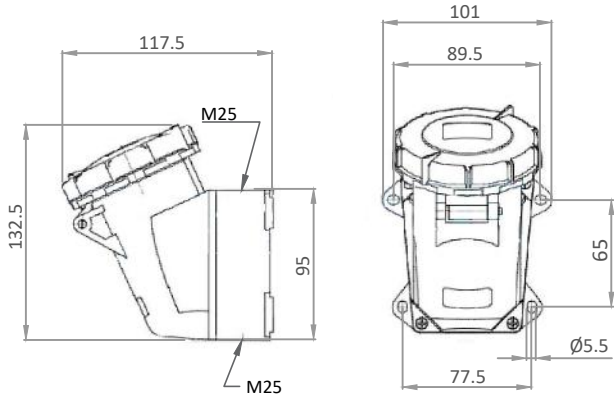

PRODUCT OVERVIEW


- IP67
- High impact & heat resistant Polyamide material
- Color coding as per voltage
- Terminals with zinc plated screws

PINS POSITION




PRODUCT SPECIFICATION

SR. NO.	PARAMETER		SPECIFICATION
1	Surface Mount Socket Type		16A, 3 Pin (2P+E)
2	V/A Rating		16A, 200V-250V AC, 50-60 Hz
3	Insulation Resistance At 500 V DC		100 M ohms min.
4	H.V.Break Down Test (For 1 Min)		2 KV AC
5	Terminals		Screw Type
6	Applicable Cable Size		1.5-2.5 sqmm
7	Earth Position		6h
8	Plug Angle		25°
9	Permissible Temperature		-20°C to +60°C
10	Material	Body	Polyamide
		Terminals	Copper Alloy
		Terminal Screw	MS, Zinc Plated
11	IP Protection Type		IP 67
12	Reference Standard		IEC/EN 60309-1, IEC/EN 60309-2, UL-1686
13	Compliance Marking		CE
14	Weight		290 gm (Approximate)

							PRODUCT :- Surface Mount Socket			CODE : 1379										
							APP	13.04.2024	PBM	 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com										
							CHK	13.04.2024	GJG											
							DRN	13.04.2024	RLP											
REV	IS	WAS	DATE	SIGN	APP	BY	DATE	SIGN												
UNSP.TOLERANCE			DIMNS. IN	WT(Gm)	SCALE:-	PROJECTION		SHEET	DRAWING NUMBER											
OVER	-	1	10	mm	Max.			1 OF 1	0	0	0	0	0	1	3	7	9	REVISION		
UP TO	1	10	-																	
±	0.3	0.5	1.0														R0			

16A 5 Pin 200/346V - 240/415V 6h IP67 Surface Mount Socket


BASIC DIMENSIONS

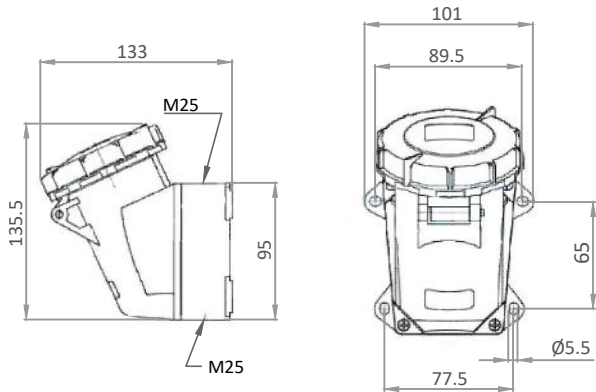

PRODUCT OVERVIEW


- IP67
- High impact & heat resistant Polyamide material
- Color coding as per Voltage
- Terminals with zinc plated Screws

PINS POSITION




PRODUCT SPECIFICATION

SR. NO.	PARAMETER		SPECIFICATION
1	Surface Mount Socket Type		16A, 5 Pin (3P+N+E)
2	V/A Rating		16A, 200/346V - 240/415V, 50-60 Hz
3	Insulation Resistance At 500 V DC		100 M ohms min.
4	H.V.Break Down Test (For 1 Min)		2 KV AC
5	Terminals		Screw Type
6	Applicable Cable Size		1.5-2.5 sqmm
7	Earth Position		6h
8	Plug Angle		25°
9	Permissible Temperature		-20°C to +60°C
10	Material	Body	Polyamide
		Terminals	Copper Alloy
		Terminal Screw	MS, Zinc Plated
11	IP Protection Type		IP 67
12	Reference Standard		IEC/EN 60309-1, IEC/EN 60309-2, UL-1686
13	Compliance Marking		CE
14	Weight		365 grm (Approximate)

						PRODUCT :- Surface Mount Socket			CODE : 1579		
						APP	13.04.2024	PBM	 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com		
						CHK	13.04.2024	GJG			
						DRN	13.04.2024	RLP			
REV	IS	WAS	DATE	SIGN	APP	BY	DATE	SIGN	DRAWING NUMBER		
UNSP.TOLERANCE				DIMNS. IN	WT(Gm)	SCALE:-	PROJECTION	SHEET	0 0 0 0 0 1 5 7 9		
OVER	-	1	10	mm	Max.	NTS.		1 OF 1	REVISION		
UP TO	1	10	-						R0		
±	0.3	0.5	1.0								

32A 3 Pin 200V 250V 6h IP67 Surface Mount Socket


BASIC DIMENSIONS

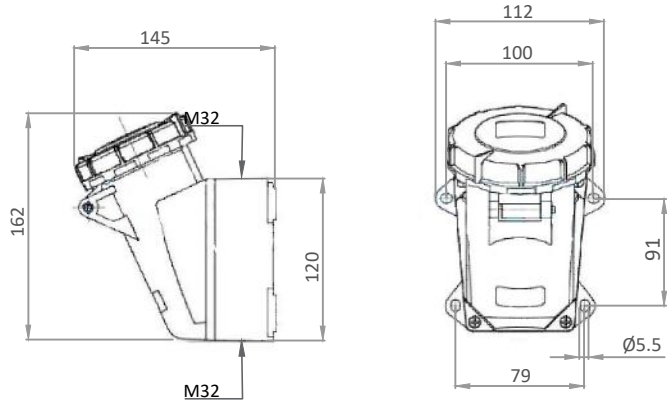

PRODUCT OVERVIEW


- IP67
- High impact & heat resistant Polyamide material
- Color coding as per voltage
- Terminals with Zinc Plated Screws

PINS POSITION




PRODUCT SPECIFICATION

SR. NO.	PARAMETER		SPECIFICATION
1	Wall mount Industrial Socket Type		32A, 3 Pin (2P+E)
2	V/A Rating		32A, 200V - 250V AC, 50 - 60 Hz
3	Insulation Resistance At 500 V DC		100 M ohms min.
4	H.V.Break Down Test (For 1 Min)		2 KV AC
5	Terminals		Screw Type
6	Applicable Cable Size		4 - 6 sqmm
7	Earth Position		6h
8	Plug Angle		25°
9	Permissible Temperature		-20°C to +60°C
10	Material	Body	Polyamide
		Terminals	Copper Alloy
		Terminal Screw	MS, Zinc Plated
11	IP Protection Type		IP 67
12	Reference Standard		IEC/EN 60309-1, IEC/EN 60309-2, UL-1686
13	Compliance Marking		CE
14	Weight		475 gm (Approximate)

						PRODUCT :- Surface Mount Socket			CODE : 3379		
						APP	13.04.2024	PBM	 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com		
						CHK	13.04.2024	GJG			
						DRN	13.04.2024	RLP			
REV	IS	WAS	DATE	SIGN	APP	BY	DATE	SIGN	DRAWING NUMBER		
UNSP.TOLERANCE				DIMNS. IN	WT(Gm)	SCALE:-	PROJECTION	SHEET	0 0 0 0 0 3 3 7 9		
OVER	-	1	10	mm	Max.	NTS.		1 OF 1	REVISION		
UP TO	1	10	-						R0		
±	0.3	0.5	1.0								

32A 5 Pin 200/346V - 240/415V 6h IP67 Surface Mount Socket


BASIC DIMENSIONS

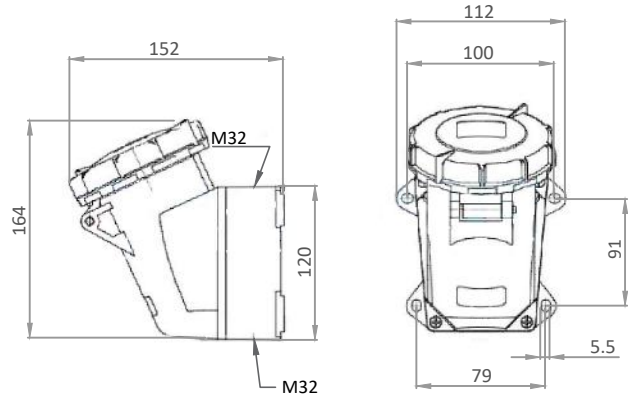

PRODUCT OVERVIEW


- IP67
- High impact & heat resistant Polyamide material
- Color coding as per voltage
- Terminals with Zinc Plated screws.

PINS POSITION



PRODUCT SPECIFICATION

SR. NO.	PARAMETER		SPECIFICATION
1	Wall mount Industrial Socket Type		32A, 5 Pin (3P+N+E)
2	V/A Rating		32A, 200/346V - 240/415V AC, 50-60 Hz
3	Insulation Resistance At 500 V DC		100 Mohms min.
4	H.V.Break Down Test (For 1 Min)		2 KV AC
5	Terminals		Screw Type
6	Applicable Cable Size		4 - 6 sqmm
7	Earth Position		6h
8	Plug Angle		25°
9	Permissible Temperature		-20°C to+60°C
10	Material	Body	Polyamide
		Terminals	Copper Alloy
		Terminal Screw	MS, Zinc Plated
11	IP Protection Type		IP 67
12	Reference Standard		IEC/EN 60309-1,IEC/EN 60309-2,UL-1686
13	Compliance Marking		CE
14	Weight		533 gm (Approximate)

							PRODUCT :- Surface Mount Socket			CODE : 3579								
							APP	13.04.2024	PBM	 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com								
							CHK	13.04.2024	GJG									
							DRN	13.04.2024	RLP									
REV	IS	WAS	DATE	SIGN	APP	BY	DATE	SIGN										
UNSP.TOLERANCE			DIMNS. IN	WT(Gm)	SCALE:-	PROJECTION		SHEET	DRAWING NUMBER									
OVER	-	1	10	mm	Max.			1 OF 1	0	0	0	0	0	3	5	7	9	REVISION
UP TO	1	10	-						R0									
±	0.3	0.5	1.0															