


16 A 3P IP44 Plug, Socket with WH in Metal Enclosure with MCB Provision


ENCLOSURE DIMENSIONS



PRODUCT IMAGE

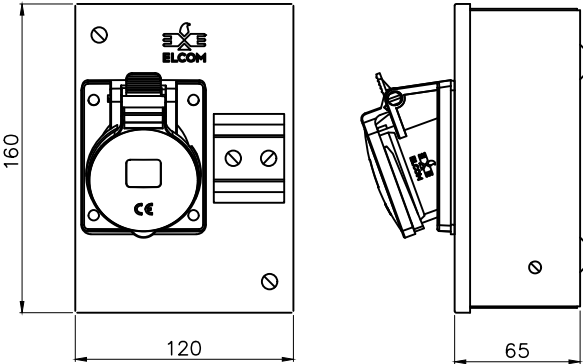


PLUG



16A 3P IP44 Plug (1342)

WIRING DIAGRAM

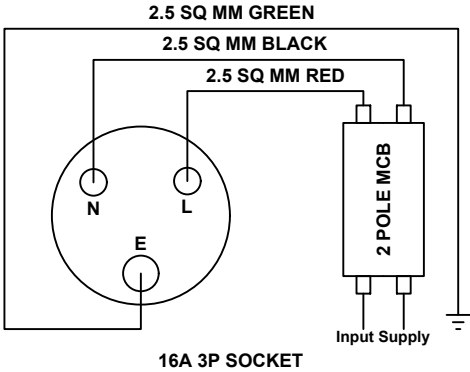

16A 3P SOCKET

PRODUCT OVERVIEW

Plug Socket Features:

1. High impact & heat resistant polyamide material


2. Terminal with Double Screws, zinc plated

3. Glow wire Index: 850° C

4. Flame retardant material

5. Permissible temp. with / without load : -25°C to +90°C

Sr.	Description	Specification	Qty.
1	Plug	16A, 3P, IP44 Plug (1342)	1 Nos
2	Panel Mount (Angular) Socket	16A, 3P, IP44 Panel Mount (Angular) Socket (1346)	1 Nos
3	Wire Harness	2.5 Sq. mm. R, G, Bk Wire Harness	1 Nos
4	Metal Enclosure	120 X 160 X 65 mm, Powder Coated, RAL 9010 Glossy Finish	1 Nos

						PRODUCT :- 16 A 3P IP44 Plug, Socket with WH in Metal Enclosure with MCB Provision				CODE : M13462							
						APP		12.05.2024		PBM		 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com					
						CHK		12.05.2024		GJG							
						DRN		12.05.2024		SRK							
REV	IS	WAS	DATE	SIGN	APP	BY	DATE	SIGN									
UNSP.TOLERANCE				DIMNS. IN		WT(Gm)		SCALE:-		PROJECTION		SHEET		DRAWING NUMBER			
OVER - 1 10				mm		Max.		NTS.				1 OF 1		M 1 3 4 6 2			
UP TO 1 10 -														REVISION			
± 0.5 0.8 2.0														R0			

F:ENG-08.00

Note: Technical specifications are subject to change without prior notice

For Disposal of Product /Packing please refer note available on www.elcom-in.com

Copyright © 2024 by Elcom International Pvt.Ltd, India. All rights reserved