
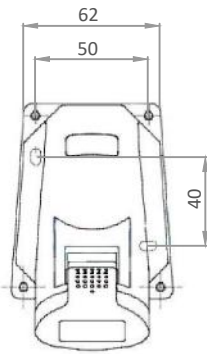


16A 3 Pin 200V - 250V 6h IP44 Surface Mount Socket


BASIC DIMENSIONS

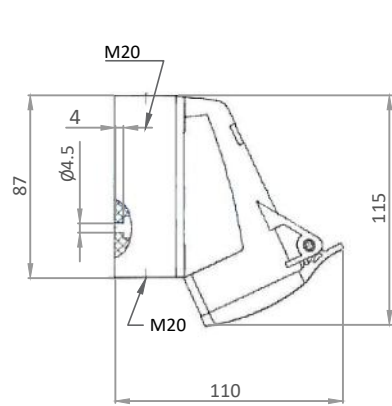

PRODUCT OVERVIEW


- IP44
- High impact & heat resistant Polyamide material
- Color coding as per voltage
- Terminals with zinc plated screws

PINS POSITION




PRODUCT SPECIFICATION

SR. NO.	PARAMETER		SPECIFICATION
1	Surface Mount Socket Type		16A, 3 Pin (2P+E)
2	V/A Rating		16A, 200V - 250V AC, 50 - 60 Hz
3	Insulation Resistance At 500 V DC		100 M ohms min.
4	H.V.Break Down Test (For 1 Min)		2 KV AC
5	Terminals		Screw Type
6	Applicable Cable Size		1.5-2.5 sqmm
7	Earth Position		6h
8	Plug Angle		25°
9	Permissible Temperature		-20°C to +60°C
10	Material	Body	Polyamide
		Terminals	Copper Alloy
		Terminal Screw	MS, Zinc Plated
11	IP Protection Type		IP 44
12	Reference Standard		IEC/EN 60309-1, IEC/EN 60309-2, UL-1686
13	Compliance Marking		CE
14	Weight		215 grams (Approximate)

							PRODUCT :- Surface Mount Socket			CODE : 1349									
							APP	13.04.2024	PBM	 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com									
							CHK	13.04.2024	GJG										
							DRN	13.04.2024	RLP										
REV	IS	WAS	DATE	SIGN	APP	BY	DATE	SIGN											
UNSP.TOLERANCE			DIMNS. IN	WT(Gm)	SCALE:-		PROJECTION	SHEET	DRAWING NUMBER										
OVER	-	1	10	mm	Max.	NTS.		1 OF 1	0	0	0	0	0	1	3	4	9	REVISION	
UP TO	1	10	-														R0		
±	0.3	0.5	1.0																

16A 5 Pin 200/346V - 240/415V 6h IP44 Surface Mount Socket


BASIC DIMENSIONS

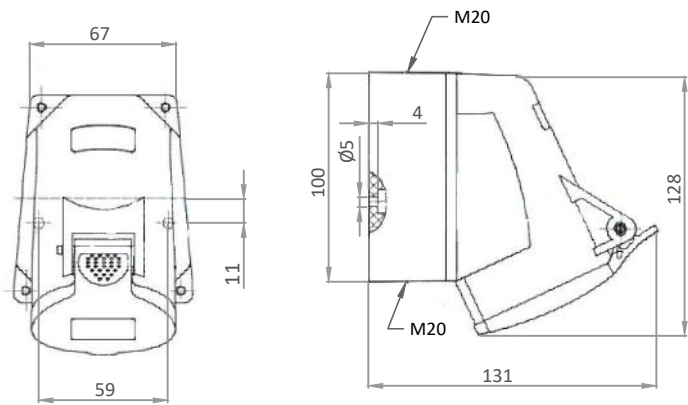

PRODUCT OVERVIEW


- IP44
- High impact & heat resistant Polyamide material
- Color coding as per Voltage
- Terminals with zinc plated screws

PINS POSITION




PRODUCT SPECIFICATION

SR. NO.	PARAMETER		SPECIFICATION
1	Surface Mount Socket Type		16A, 5 Pin (3P+N+E)
2	V/A Rating		16A, 200/346V - 240/415V AC, 50-60 Hz
3	Insulation Resistance At 500 V DC		100 M ohms min.
4	H.V.Break Down Test (For 1 Min)		2 KV AC
5	Terminals		Screw Type
6	Applicable Cable Size		1.5-2.5 sqmm
7	Earth Position		6h
8	Plug Angle		25°
9	Permissible Temperature		-20°C to +60°C
10	Material	Body	Polyamide
		Terminals	Copper Alloy
		Terminal Screw	MS, Zinc Plated
11	IP Protection Type		IP 44
12	Reference Standard		IEC/EN 60309-1, IEC/EN 60309-2, UL-1686
13	Compliance Marking		CE
14	Weight		322 grams (Approximate)

						PRODUCT :- Surface Mount Socket			CODE : 1549												
						APP	13.04.2024	PBM	 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com												
						CHK	13.04.2024	GJG													
						DRN	13.04.2024	RLP													
REV	IS	WAS	DATE	SIGN	APP	BY	DATE	SIGN													
UNSP.TOLERANCE			DIMNS. IN	WT(Gm)	SCALE:-		PROJECTION	SHEET	DRAWING NUMBER												
OVER	-	1	10	mm	Max.	NTS.		1 OF 1													
UP TO	1	10	-							0	0	0	0	0	1	5	4	9	REVISION		
±	0.3	0.5	1.0							R0											

32A 3 Pin 200V - 250V 6h IP44 Surface Mount Socket


BASIC DIMENSIONS

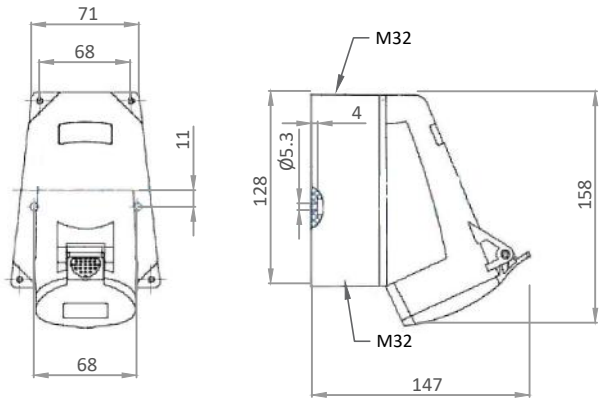

PRODUCT OVERVIEW


- IP44
- High impact & heat resistant Polyamide material
- Color coding as per voltage
- Terminals with Zinc plated screws

PINS POSITION




PRODUCT SPECIFICATION

SR. NO.	PARAMETER		SPECIFICATION
1	Surface Mount Socket Type		32A, 3 Pin (2P+E)
2	V/A Rating		32A, 200V - 250V AC, 50 - 60 Hz
3	Insulation Resistance At 500 V DC		100 M ohms min.
4	H.V.Break Down Test (For 1 Min)		2 KV AC
5	Terminals		Screw Type
6	Applicable Cable Size		4 - 6 sqmm
7	Earth Position		6h
8	Plug Angle		25°
9	Permissible Temperature		-20°C to +60°C
10	Material	Body	Polyamide
		Terminals	Copper Alloy
		Terminal Screw	MS, Zinc Plated
11	IP Protection Type		IP 44
12	Reference Standard		IEC/EN 60309-1,IEC/EN 60309-2,UL-1686
13	Compliance Marking		CE
14	Weight		426 grams (Approximate)

						PRODUCT :- Surface Mount Socket			CODE : 3349																				
						APP	13.04.2024	PBM	Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com																				
						CHK	13.04.2024	GJG																					
						DRN	13.04.2024	RLP																					
REV	IS		WAS		DATE	SIGN	APP	BY	DATE	SIGN																			
UNSP.TOLERANCE				DIMNS. IN		WT(Gm)		SCALE:-		PROJECTION		SHEET		DRAWING NUMBER															
OVER	-	1	10	mm		Max.		NTS.				1 OF 1		0	0	0	0	0	3	3	4	9	REVISION						
UP TO	1	10	-																					R0					
±	0.3	0.5	1.0																										

32A 5 Pin 200/346V - 240/415V 6h IP44 Surface Mount Socket


BASIC DIMENSIONS

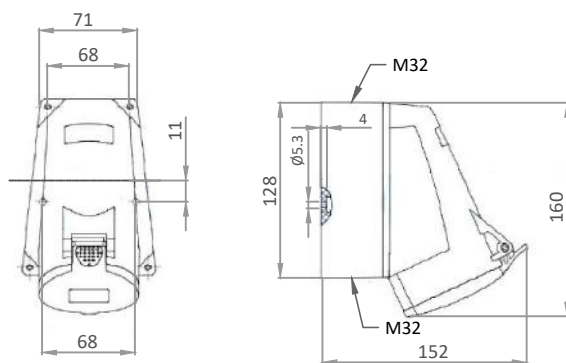

PRODUCT OVERVIEW


- IP44
- High impact & heat resistant Polyamide material
- Color coding as per voltage
- Terminals with Zinc Plated Screws

PINS POSITION



PRODUCT SPECIFICATION

SR. NO.	PARAMETER		SPECIFICATION
1	Surface Mount Socket Type		32A, 5 Pin (3P+N+E)
2	V/A Rating		32A, 200/346V - 240/415V AC, 50-60 Hz
3	Insulation Resistance At 500 V DC		100 Mohms min.
4	H.V.Break Down Test (For 1 Min)		2 KV AC
5	Terminals		Screw Type
6	Applicable Cable Size		4 - 6 sqmm
7	Earth Position		6h
8	Plug Angle		25°
9	Permissible Temperature		-20°C to +60°C
10	Material	Body	Polyamide
		Terminals	Copper Alloy
		Terminal Screw	MS, Zinc Plated
11	IP Protection Type		IP 44
12	Reference Standard		IEC/EN 60309-1, IEC/EN 60309-2, UL-1686
13	Compliance Marking		CE
14	Weight		478 gm (Approximate)

							PRODUCT :- Surface Mount Socket			CODE : 3549									
							APP	13.04.2024	PBM										
							CHK	13.04.2024	GJG	 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com									
							DRN	13.04.2024	RLP										
REV	IS	WAS	DATE	SIGN	APP	BY	DATE	SIGN											
UNSP.TOLERANCE				DIMNS. IN	WT(Gm)	SCALE:-	PROJECTION	SHEET	DRAWING NUMBER										
OVER	-	1	10	mm	Max.	NTS.		1 OF 1	0	0	0	0	0	3	5	4	9	REVISION	
UP TO	1	10	-							R0									
±	0.3	0.5	1.0																

F:ENG-08.00

Copyright © 2024 by Elcom International Pvt.Ltd, India. All rights reserved

Note: Technical specifications are subject to change without prior notice

For Disposal of Product /Packing please refer note available on www.elcom-in.com