



16A Plug - 3Pin_200V-250V_6h_IP44

BASIC DIMENSIONS

PINS POSITION

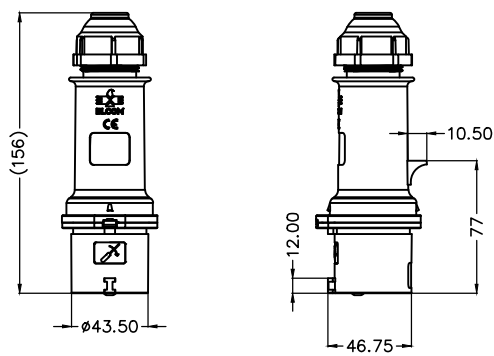


PRODUCT OVERVIEW

- IP44
- High impact & heat resistant Polyamide material
- Color coding as per Voltage
- Terminal with Double Screws, zinc plated
- Glow wire Index: 850° C
- UL-94 V-2 Flame retardant material
- Cable gland for external cable grip

PRODUCT SPECIFICATION

SR.NO.	PARAMETER		SPECIFICATION
1	Industrial Plug		16A, 3 Pin (2P+ E)
2	V/A Rating		16A, 200-250 VAC, 50 - 60Hz
3	Insulation Resistance At 500 V DC		100 M ohms min.
4	H.V.Break Down Test (For 1-Minute)		2 KV AC
5	Terminals		Screw-type
6	Applicable Cable Sizes		1.5 - 2.5 Sqmm
7	Earth Position		6h
8	Plug Angle		Straight
9	Permissible Temp.	a. With/Without Load	-25°C TO +90°C
10	Material	a. Body	Polyamide , V2
		b. Terminals	Copper Alloy
		c. Terminal screws	MS, Zinc Plated
11	Torque	a. Tightening Torque for Screw	0.9 Nm Max.
		b. Tightening Torque for Cable Gland	3 Nm Max.
12	IP Protection type		IP44
13	Reference Standard		IEC/EN 60309-1, IEC/EN 60309-2, UL-1686
14	Compliance Marking		CE, RoHS Complied
15	Weight		140 gm (Approximate)

						PRODUCT :- Industrial Plug			CODE : 1342							
						APP	29.01.2024	GJG	 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com							
						CHK	29.01.2024	SRK								
						DRN	29.01.2024	VAK								
REV	IS	WAS	DATE	SIGN	APP	BY	DATE	SIGN								
UNSP.TOLERANCE			DIMNS. IN	WT(Gm)	SCALE:-		PROJECTION	SHEET	DRAWING NUMBER							
OVER	-	1	10	mm	Max.	NTS.			1	OF	1	000001342				REVISION
UP TO	1	10	-									R0				
±	0.3	0.5	1.0													

CONTROLLED COPY			PRODUCT DATA SHEET			REFERENCE		
16A Industrial Plug - 5Pin_200V/346V-250V/415V_6h_IP44								
BASIC DIMENSIONS				PINS POSITION				
PRODUCT OVERVIEW								
- IP44 - High impact & heat resistant Polyamide material - Color coding as per Voltage - Terminal with Double Screws, zinc plated - Glow wire Index: 850° C - UL-94 V-2 Flame retardant material - Cable gland for external cable grip								
PRODUCT SPECIFICATION								
SR.NO.		PARAMETER			SPECIFICATION			
1		Industrial Plug			16A, 5 Pin (3P+ N+ E)			
2		V/A Rating			16A, 200V/346V-250V/415C AC, 50 - 60Hz			
3		Insulation Resistance At 500 V DC			100 M ohms min.			
4		H.V.Break Down Test (For 1-Minute)			2 KV AC			
5		Terminals			Screw-type			
6		Applicable Cable Sizes			1.5 - 2.5 Sqmm			
7		Earth Position			6 h			
8		Plug Angle			Straight			
9		Permissible Temp.	a. With/Without Load		-25°C TO +90°C			
10		Material	a. Body		Polyamide , V2			
			b. Terminals		Copper Alloy			
			c. Terminal screws		MS, Zinc Plated			
11		Torque	a. Tightening Torque for Screw		0.9 Nm Max.			
			b. Tightening Torque for Cable Gland		3 Nm Max.			
12		IP Protection type			IP44			
13		Reference Standard			IEC/EN 60309-1, IEC/EN 60309-2, UL-1686			
14		Compliance Marking			CE, RoHS Complied			
15		Weight			202 gm (Approximate)			

						PRODUCT :-			CODE :			
						Industrial Plug			1542			
						APP	29.01.2024	GJG	 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com			
						CHK	29.01.2024	SRK				
						DRN	29.01.2024	VAK				
REV	IS	WAS	DATE	SIGN	APP	BY	DATE	SIGN				
UNSP.TOLERANCE			DIMNS. IN	WT(Gm)	SCALE:-		PROJECTION	SHEET	DRAWING NUMBER			
OVER	-	1	10	mm	Max.	NTS.		1 OF 1	0 0 0 0 0 1 5 4 2			
UP TO	1	10	-						REVISION			
±	0.3	0.5	1.0						R0			

F:ENG-08.00


Note: Technical specifications are subject to change without prior notice

For Disposal of Product /Packing please refer note available on www.elcom-in.com


Copyright © 2024 by Elcom International Pvt.Ltd, India. All rights reserved

32A Industrial Plug - 3Pin_200V-250V_6h_IP44

BASIC DIMENSIONS

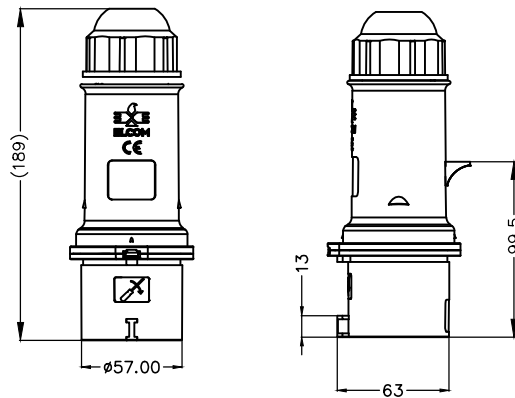

PINS POSITION




PRODUCT OVERVIEW

- IP44
- High impact & heat resistant Polyamide material
- Color coding as per Voltage
- Terminal with Double Screws, zinc plated
- Glow wire Index: 850° C
- UL-94 V-2 Flame retardant material
- Cable gland for external cable grip

PRODUCT SPECIFICATION

SR.NO.	PARAMETER		SPECIFICATION
1	Industrial Plug		32A, 3 Pin (2P+ E)
2	V/A Rating		32A, 200-250 VAC, 50 - 60Hz
3	Insulation Resistance At 500 V DC		100 M ohms min.
4	H.V.Break Down Test (For 1-Minute)		2 KV AC
5	Terminals		Screw-type
6	Applicable Cable Sizes		4 - 6 Sq mm
7	Earth Position		6h
8	Plug Angle		Straight
9	Permissible Temp.	a. With/Without Load	-25°C TO +90°C
10	Material	a. Body	Polyamide , V2
		b. Terminals	Copper Alloy
		c. Terminal screws	MS, Zinc Plated
11	Torque	a. Tightening Torque for Screw	0.9 Nm Max.
		b. Tightening Torque for Cable Gland	4 Nm Max.
12	IP Protection type		IP44
13	Reference Standard		IEC/EN 60309-1, IEC/EN 60309-2, UL-1686
14	Compliance Marking		CE, RoHS Complied
15	Weight		250 gm (Approximate)

							PRODUCT :- Industrial Plug			CODE : 3342												
							APP	29.01.2024	GJG	 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com												
							CHK	29.01.2024	SRK													
							DRN	29.01.2024	VAK													
REV	IS		WAS		DATE	SIGN	APP	BY	DATE	SIGN												
UNSP.TOLERANCE				DIMNS. IN		WT(Gm)		SCALE:-		PROJECTION  SHEET 1 OF 1		DRAWING NUMBER										
OVER	-	1	10	mm		Max.		NTS.				E00003342 REVISION R0										
UP TO	1	10	-																			
+	0.3	0.5	1.0																			

F:ENG-08.00


Note: Technical specifications are subject to change without prior notice

For Disposal of Product /Packing please refer note available on www.elcom-in.com


Copyright © 2024 by Elcom International Pvt.Ltd, India. All rights reserved

32A Industrial Plug - 5Pin_200V/346V-250V/415V_6h_IP44

BASIC DIMENSIONS

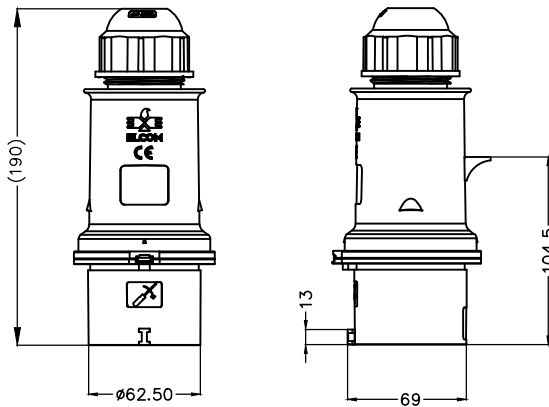

PINS POSITION




PRODUCT OVERVIEW

- IP44
- High impact & heat resistant Polyamide material
- Color coding as per Voltage
- Terminal with Double Screws, zinc plated
- Glow wire Index: 850° C
- UL-94 V-2 Flame retardant material
- Cable gland for external cable grip

PRODUCT SPECIFICATION

SR.NO.	PARAMETER		SPECIFICATION
1	Industrial Plug		32A, 5 Pin (3P+ N+ E)
2	V/A Rating		32A, 200V/346V-250V/415C AC, 50 - 60Hz
3	Insulation Resistance At 500 V DC		100 M ohms min.
4	H.V.Break Down Test (For 1-Minute)		2 KV AC
5	Terminals		Screw-type
6	Applicable Cable Sizes		4 - 6 Sq mm
7	Earth Position		6h
8	Plug Angle		Straight
9	Permissible Temp.	a. With/Without Load	-25°C TO +90°C
10	Material	a. Body	Polyamide , V2
		b. Terminals	Copper Alloy
		c. Terminal screws	MS, Zinc Plated
11	Torque	a. Tightening Torque for Screw	0.9 Nm Max.
		b. Tightening Torque for Cable Gland	4 Nm Max.
12	IP Protection type		IP44
13	Reference Standard		IEC/EN 60309-1, IEC/EN 60309-2, UL-1686
14	Compliance Marking		CE, RoHS Complied
15	Weight		340 gm (Approximate)

							PRODUCT :- Industrial Plug			CODE : 3542													
							APP	29.01.2024	GJG	 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com													
							CHK	29.01.2024	SRK														
							DRN	29.01.2024	VAK														
REV	IS		WAS		DATE	SIGN	APP	BY	DATE	SIGN													
UNSP.TOLERANCE				DIMNS. IN		WT(Gm)		SCALE:-				SHEET 1 OF 1		DRAWING NUMBER									
OVER	-	1	10	mm		Max.		NTS.						000003542 REVISION R0									
UP TO	1	10	-																				
+	0.3	0.5	1.0																				


F:ENG-08.00

Note: Technical specifications are subject to change without prior notice

For Disposal of Product /Packing please refer note available on www.elcom-in.com

Copyright © 2024 by Elcom International Pvt.Ltd, India. All rights reserved


63A Industrial Plug - 5 Pin_200V/346V-240V/415V_6h_IP44

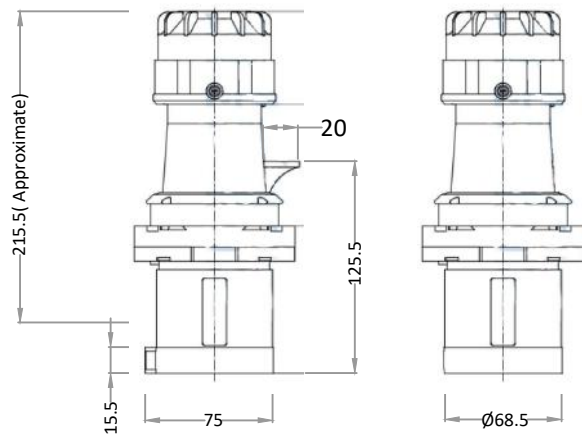

PRODUCT OVERVIEW


- IP44
- High impact & heat resistant Polyamide Material
- Color coding as per Voltage
- Nickel plated Terminal with Double Screws
- Cable gland for external cable grip

PINS POSITION



PRODUCT SPECIFICATION

SR. NO.	PARAMETER		SPECIFICATION
1	Industrial Plug Type		63A, 5 Pin (3P + N + E)
2	V/A Rating		63A, 200V/346V - 240V/415V AC, 50-60Hz
3	Insulation Resistance At 500 V DC		100 M ohms min.
4	H.V.Break Down Test (For 1 Minute)		2.5 KV AC
5	Terminals		Screw Type
6	Applicable Cable Size		10 - 16 sqmm
7	Earth Position		6h
8	Plug Angle		Straight
9	Permissible Temperature		-20°C to+80°C
10	Material	Body	Polyamide
		Terminals	Brass, Nickel Plated
		Terminal Screw	MS, Zinc Plated
11	IP Protection Type		IP 44
12	Reference Standard		IEC/EN 60309-1,IEC/EN 60309-2,UL-1686
13	Compliance Marking		CE
14	Weight		575 gms (Approximate)

							PRODUCT :- Industrial Plug			CODE : 6542														
							APP	06-02-2024	GJG	 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com														
							CHK	06-02-2024	SRK															
							DRN	06-02-2024	RLP															
REV	IS	WAS		DATE	SIGN	APP	BY	DATE	SIGN															
UNSP.TOLERANCE				DIMNS. IN		WT(Gm)		SCALE:-		PROJECTION  SHEET 1 OF 1		DRAWING NUMBER										REVISION		
OVER	-	1	10	mm		Max.		NTS.				000006542												
UP TO	1	10	-									R0												
+	0.3	0.5	1.0																					

F:ENG-08.00

Note: Technical specifications are subject to change without prior notice

For Disposal of Product /Packing please refer note available on www.elcom-in.com

Copyright © 2024 by Elcom International Pvt.Ltd, India. All rights reserved