

General Purpose AC EMI Filter



*Image shown is for illustrative purpose only

Approvals /Conformance



Technical Specifications

Operating voltage	120/250 VAC
Current rating	1A-20A
Frequency	50/60Hz
Voltage drop	1 Volt max.
High potential test voltage	P -> E 1500VAC P -> N 1414VDC (applicable for excluding surge suppressor filter)
Insulation resistance	$\geq 300 \text{ M}\Omega @ 500\text{VDC (PN} \rightarrow \text{E)}$
Operating temperature	40°C / -25°C +85°C

Features and benefits

- Filters available in single stage and double stage.
- All filters provide high attenuation performance.
- All filters compliance to EN60939-3:2015 & EN60939-2:2005 standards.
- Filter available in snap fit provision.
- CRCA metal can with nickel plating provides good aesthetic and corrosion protection
- High reliable
- Input connection through IEC 60320 C20 plug
- Filters available in medical version without capacitor to earth.
- With surge suppressor filters also available.

Application

- Consumer product
- Medical equipment
- Industrial application
- Electrical automation equipment
- Solar inverter

Attenuation type

Single Stage


Standard

Double Stage


High

Electrical schematic for Single Stage filter:


General purpose –

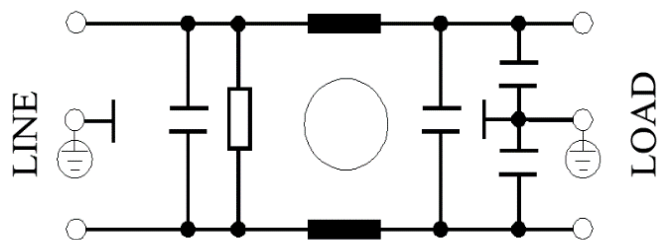


General purpose with Surge Suppressor –

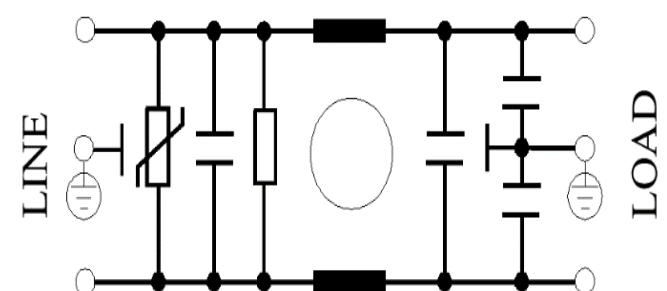

Medical equipment application -

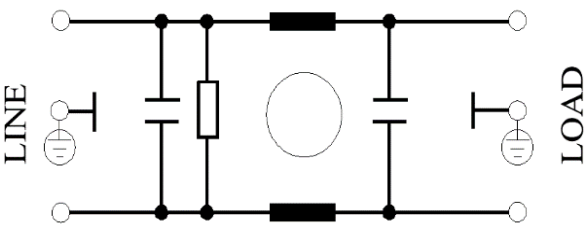


Medical equipment application with Surge Suppressor

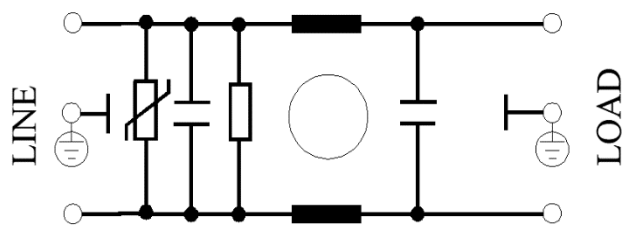


Electrical schematic for Double Stage Filter


General purpose -

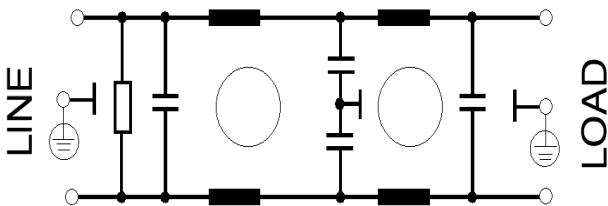


Medical equipment application -

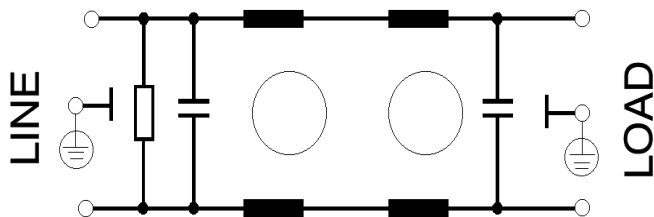


General purpose with Surge Suppressor -

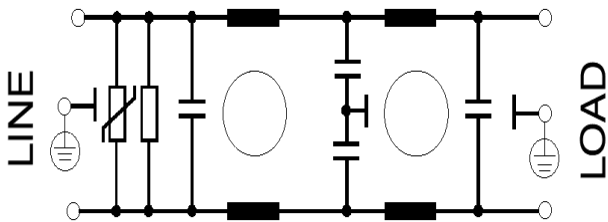

Medical equipment application with Surge Suppressor -

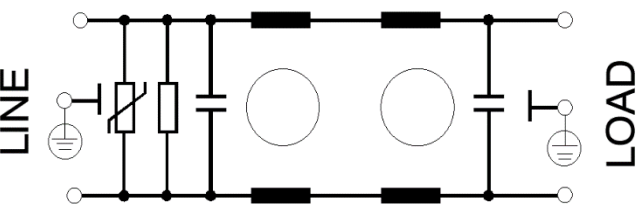

Mechanical Drawing

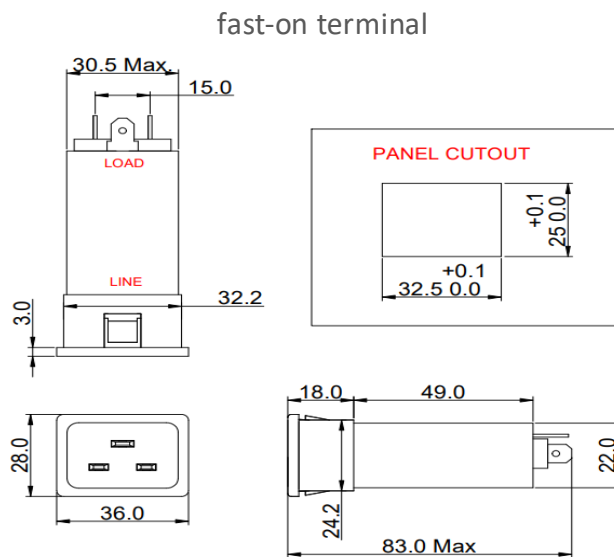

Product Selection Table:

All Dimension in mm
General tolerance=±1mm

Sr. No.	Elcom part codes (ordering code)	Rated Current rating (A) @40°C	Leakage current (mA) @250VAC	Terminals (X)	Max. Peak current (8/20 μ sec 1 time) (KA)	Energy surge rating (10/1000 μ sec) (Joules)	Approx. Weight (gm)	Attenuation
				Fast-on 				
1	EF-1B001X01G-B14	1	< 0.5	B	----	----	100	Standard
2	EF-1B001X02G-B14	1	< 0.5	B	6.5	175	100	Standard
3	EF-1B001X03G-B14	1	< 0.003	B	----	----	100	Standard
4	EF-1B001X04G-B14	1	< 0.003	B	6.5	175	100	Standard
5	EF-1B003X01G-B14	3	< 0.5	B	----	----	100	Standard
6	EF-1B003X02G-B14	3	< 0.5	B	6.5	175	100	Standard
7	EF-1B003X03G-B14	3	< 0.003	B	----	----	100	Standard
8	EF-1B003X04G-B14	3	< 0.003	B	6.5	175	100	Standard
9	EF-1B006X01G-B14	6	< 0.5	B	----	----	100	Standard
10	EF-1B006X02G-B14	6	< 0.5	B	6.5	175	100	Standard
11	EF-1B006X03G-B14	6	< 0.003	B	----	----	100	Standard
12	EF-1B006X04G-B14	6	< 0.003	B	6.5	175	100	Standard
13	EF-1B010X01G-B14	10	< 0.5	B	----	----	100	Standard
14	EF-1B010X02G-B14	10	< 0.5	B	6.5	175	100	Standard
15	EF-1B010X03G-B14	10	< 0.003	B	----	----	100	Standard
16	EF-1B010X04G-B14	10	< 0.003	B	6.5	175	100	Standard
Sr. No.	Elcom part codes (ordering code)	Rated Current rating (A) @40°C	Leakage current (mA) @250VAC	Terminals (X)	Max. Peak current (8/20 μ sec 1 time) (KA)	Energy surge rating (10/1000 μ sec) (Joules)	Approx. Weight (gm)	Attenuation
				Fast-on 				
17	EF-1B015X01G-B14	15	< 0.5	B	----	----	90	Standard
18	EF-1B015X02G-B14	15	< 0.5	B	10	350	90	Standard
19	EF-1B015X03G-B14	15	< 0.003	B	----	----	90	Standard
20	EF-1B015X04G-B14	15	< 0.003	B	10	350	90	Standard
21	EF-1B020X01G-B14	20	< 0.5	B	----	----	90	Standard
22	EF-1B020X02G-B14	20	< 0.5	B	10	350	90	Standard
23	EF-1B020X03G-B14	20	< 0.003	B	----	----	90	Standard

24	EF-1B020X04G-B14	20	< 0.003	B	10	350	90	Standard
25	EF-1B001X20G-B14	1	< 0.5	B	----	----	90	High
26	EF-1B001X21G-B14	1	< 0.5	B	6.5	175	100	High
27	EF-1B001X22G-B14	1	< 0.003	B	----	----	100	High
28	EF-1B001X23G-B14	1	< 0.003	B	6.5	175	100	High
29	EF-1B003X20G-B14	3	< 0.5	B	----	----	100	High
30	EF-1B003X21G-B14	3	< 0.5	B	6.5	175	100	High
31	EF-1B003X22G-B14	3	< 0.003	B	----	----	100	High
32	EF-1B003X23G-B14	3	< 0.003	B	6.5	175	100	High
33	EF-1B006X20G-B14	6	< 0.5	B	----	----	100	High
34	EF-1B006X21G-B14	6	< 0.5	B	6.5	175	100	High
35	EF-1B006X22G-B14	6	< 0.003	B	----	----	100	High
36	EF-1B006X23G-B14	6	< 0.003	B	6.5	175	100	High
37	EF-1B010X20G-B14	10	< 0.5	B	----	----	100	High
38	EF-1B010X21E-B14	10	< 0.5	B	6.5	175	100	High
39	EF-1B010X22G-B14	10	< 0.003	B	----	----	100	High
40	EF-1B010X23G-B14	10	< 0.003	B	6.5	175	100	High
41	EF-1B015X20G-B14	15	< 0.5	B	----	----	100	High
Sr. No.	Elcom part codes (ordering code)	Rated Current rating (A) @40°C	Leakage current (mA) @250VAC	Terminals (X)	Max. Peak current (8/20 μ sec 1 time) (KA)	Energy surge rating (10/1000 μ sec) (Joules)	Weight (gm)	Attenuation
				Fast-on 				
42	EF-1B015X21G-B14	15	< 0.5	B	10	350	100	High
43	EF-1B015X22G-B14	15	< 0.003	B	----	----	100	High
44	EF-1B015X23G-B14	15	< 0.003	B	10	350	100	High
45	EF-1B020X20G-B14	20	< 0.5	B	----	----	100	High
46	EF-1B020X21G-B14	20	< 0.5	B	10	350	100	High
47	EF-1B020X22G-B14	20	< 0.003	B	----	----	100	High
48	EF-1B020X23G-B14	20	< 0.003	B	10	350	100	High

- To compile complete part number, replace the 'X' with required I/O connection terminal. (e.g. EF-1B001B20G-B14)

- Maximum leakage under usual AC operating conditions (acc. IEC 60939-3). Note: if the neutral line is interrupted, worst case leakage could reach twice this level.
- Customize products provided on request.

Connection type







Current Rating (A)	Fast-on input & Earthing	Output
1,3 & 6	C20 Inlet	6.3 X 0.8mm
10 & 15		
20		

Filter attenuation graph




C = Common mode (asymmetrical) —————

D = Differential mode (symmetrical) - - - - -

For general purpose (Single Stage)

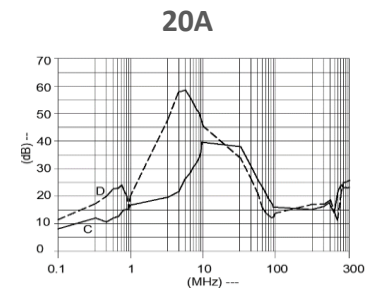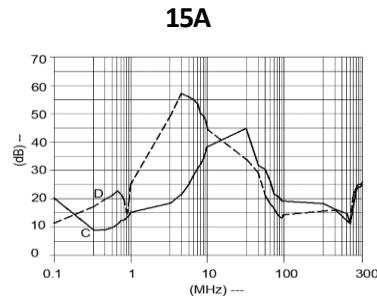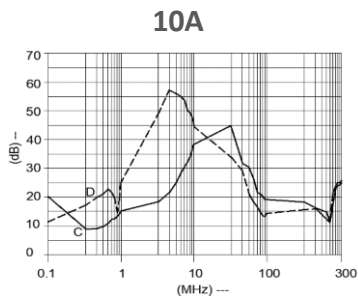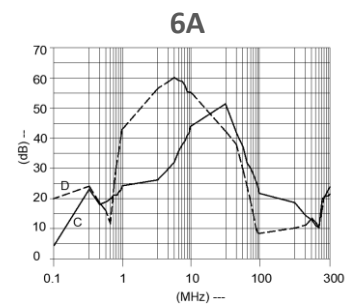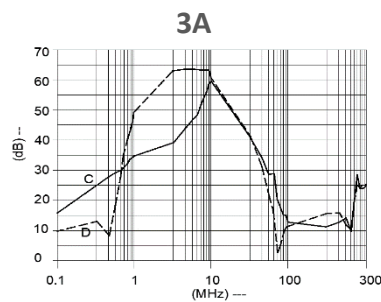




For general purpose (Double Stage)

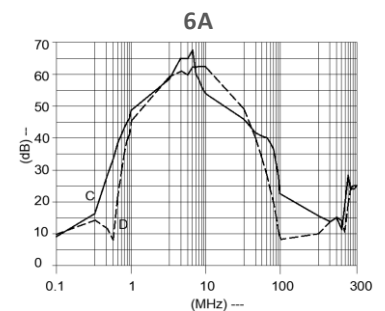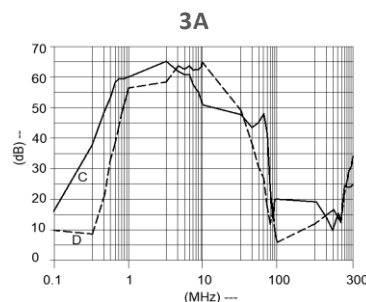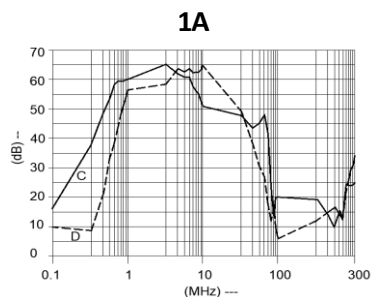

10A

15A

20A

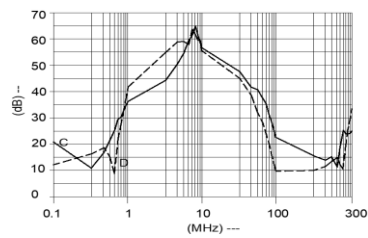

Copyright © 2022 by Elcom International Pvt.Ltd, India. All rights reserved
The content of this document has been carefully checked and understood. However, Elcom not assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer